



Ø 32, 40 & 50

- Compact and competitive series
- For ISO15552 cylinders
- Precise guide on 4 brass, polymer or ball bearings
- Rods Ø are the same as Classic Series (H and U)
- Floating coupling between cylinder rod and front plate
- Delivered with 4 screws for fixing the cylinder in the body
- Without maintenance

from 5° to 80°C

Rods: Ball bearing: hardened steel

Ø Cylinder	(mm)	Ø32	Ø40	Ø50
Ø Guide rods	(mm)	Ø12	Ø16	Ø20
Weight stroke	(kg)	0.76	1.35	2.2

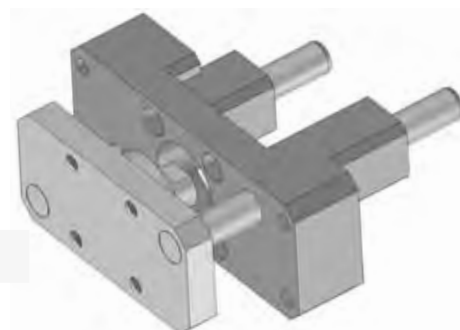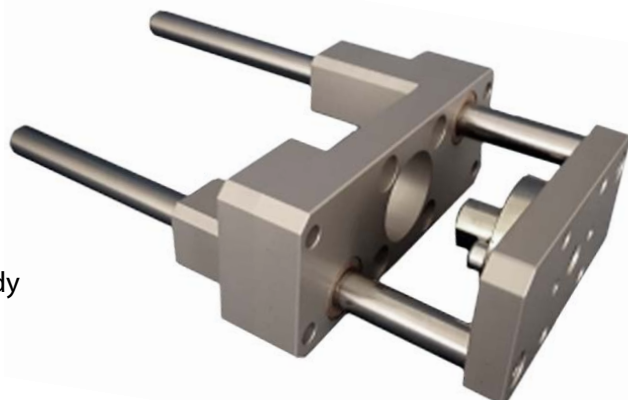




ICG : EG :

<i>Size Ø:</i>	Ø32	32		025:	25
	Ø40:	40		<i>Stroke mm:</i>	050: 50
	Ø25:	50			080: 80

Example: You need the guide with a Ø size from 20 mm and a stroke from 25 mm= **ICG20EG025*

025:	25
050:	50
080:	80
100:	100
125:	125
160:	160
200:	200

You can order them the same way as the example above, when you want with ball bearing you add: **BBS** at the end of the article code= **ICG20EG025BBS**

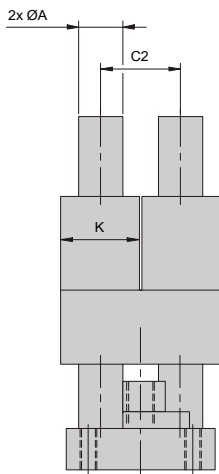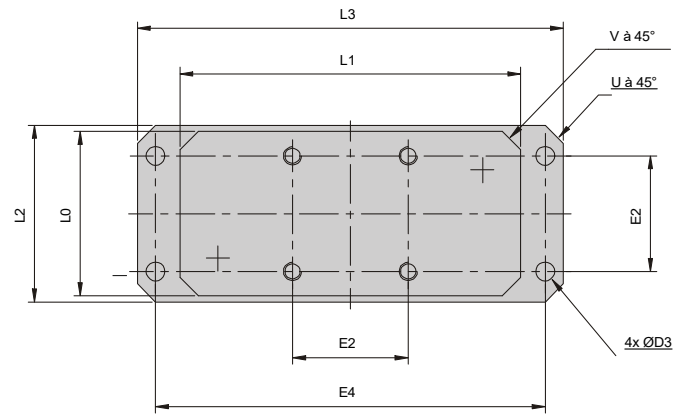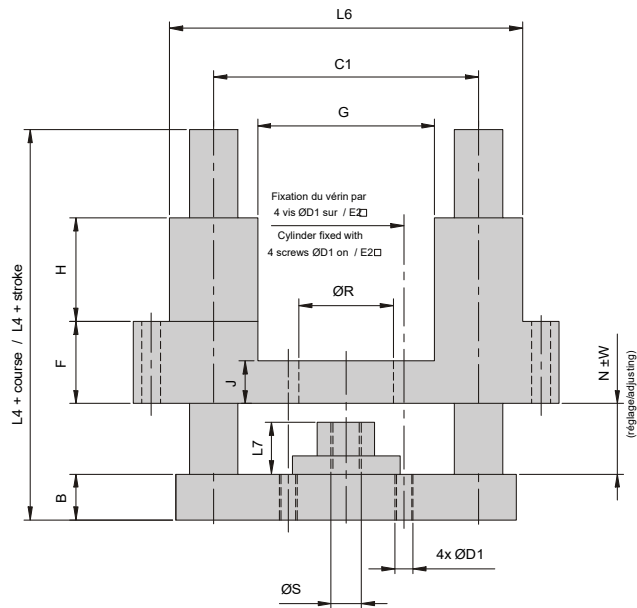

Ø Cylinder Ø	Ø 32	Ø 40	Ø 50
	for ISO15552 cylinder		
A	12	16	20
B	11	15	19
C1	74	87	104
C2	25	29	35
D1	M6	M6	M8
D3	6,2	6,2	8,5
E2	32,5	38	46,5
E4	110	128	153
F	27	27	32
G	50,2	58,2	70
H	29,5	34	32
J	14	14	19
K	24	29	34
L0	45	55	68
L1	92	112	134
L2	49	58	69
L3	122	140	168
L4	118	137	152
L6	98	116	138
L7	22	28	28
N	42	52	59
R	30	35	40
S	M10x1,25	M12x1,25	M16x1,5
U	5	6	6
V	5	6	6
W	1,5	1,5	1,5