


High magnetic field


Application environment

- **RDEP** can be applied in the strong magnetic field environment such as automotive manufacturing or areas near welding machine.
- When **RDEP** detects the magnetic AC field (50 or 60Hz) it will keep the status of output and will not be effected.

Order example




Dimension

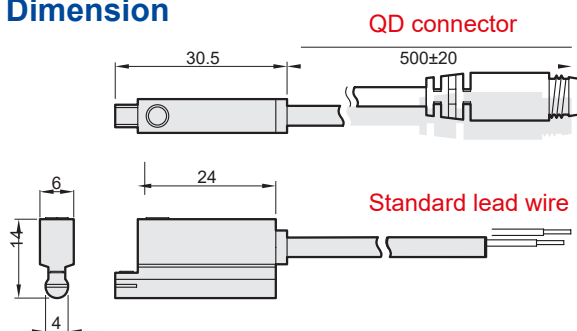



Wiring of the QD

- 2 wire



Weld-Field immune

The operational distance can be 0mm between sensor and welding gun (welding conductor or cable) when the welding current less than 16000A.

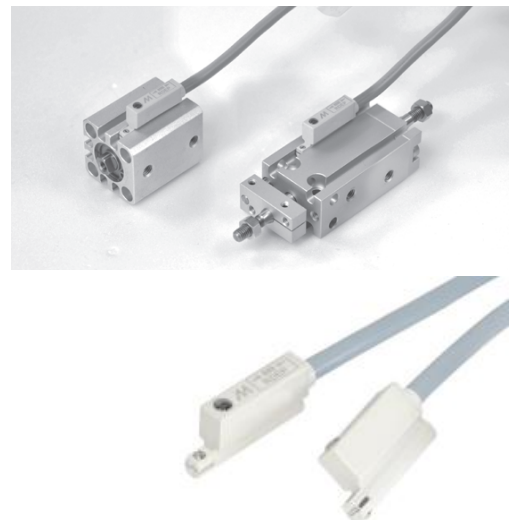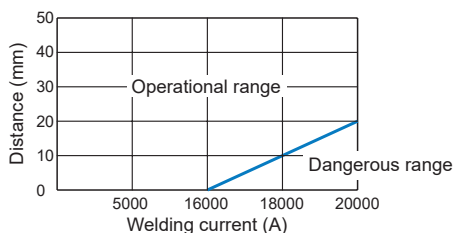

Specification

Model	RDEP
Wiring method	2 wire
Switching logic	Solid state output, normally open
Switch type	Current sourcing
Operating voltage	10~28V DC
Switching current	5~50mA max.
Switching rating (*1)	1.5W max.
Current consumption (*5)	—
Voltage drop (*5)	5V max.
Leakage current (*5)	1mA max.
Indicator (Sensing range)	Red LED: Unstable; Green LED: Stable
Cable	ø4.8, 2C, PVC
Temperature range	-10°C~+60°C (No freezing)
Shock (*2)	50G
Vibration (*3)	9G
Enclosure classification	IEC 60529 IP67
Protection circuit (*4)	3, 4
Weight	100 g (3m cable)
Connect diagram	

*1. Warning: Never exceed rating (watt=voltage×amperage). Permanent damage to sensor will occur.

*2. Sin wave / X.Y.Z. 3 directions / 3 times each direction / 11ms each time.

*3. Double amplitude 1.5mm / 10Hz~55Hz~10Hz(Sweep 1min) / X.Y.Z. 3 directions / 1 hour each time.

*4. 1=None / 2=Short-circuit / 3=Power source reverse polarity / 4=Surge suppression.

*5. It bases on conditions of voltage 24V DC, ambient temp. 25°C and cable 2M length. Voltage drop increases in pace with cable length.

*6. Caution for safety please refer to page 9-3~4.