

Oil water separators

Complete separator

with wall mounting bracket

ARTICLE INFORMATION

Push to connect

Quick links for speed and convenience. Complete separator with wall mounting bracket.

Maximum oil output:

less than 20 ppm

Maximum condensate inlet pressure:

16 bar

Min/max condensate inlet temperature:

+2 °C/ +40°C

Lifespan:

+ 4000 operating hours at 60cfm or 8000 operating hours at 30cfm (replaced after a maximum of 2 years)***

Maintenance period:

Tailored to normal compressor routine

Wall or cabinet mounting (permanent 'quick mounting plate' supplied)

- Quick and clean maintenance
 - Clip-on hood and blind stopper seal the cleaner for transport.
 - ABS plastic and filter material are recyclable.
-
- ISO9001 registered manufacturing facility in the heart of the UK
 - DIBt approval
 - Constantly striving to meet the highest international standards
 - Made in the UK
 - BCAS
 - Fully compliant

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
Netherlands

pneuparts
.com



+31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com

ARTICLE SPECIFICATIONS

Article nr.	Flow		Width - depth - height			Thread	Kg
	[m3/h]	[l/min]	mm	mm	mm		
OWS1700	102	1700	140	140	239	G 1/4"	2,9
OWS3400	204	3400	216	256	500	G 1/2"	6
OWS10200	612	10200	345	282	655	G 1/2"	7,9
OWS25500	1530	25500	432	495	988	G 1/2"	32,6
OWS35400	2124	35400	485	495	988	G 1/2"	45
OWS51000	3060	51000	988	821	988	G 1/2"	69
OWS70800	4248	70800	1077	546	988	G 1/2"	95
OWS99117	5947	99117	1000	701	1000	G 3/4"	319
OWS198217	11893	198217	1100	1100	1000	G 3/4"	467

OWS1700

Single-use, quick-fit condensate cleaner for compressed air systems up to 60cfm (1.7m³/min)

- Compressor capacity up to 60cfm (1.7 m³/min) based on 80% duty
- Service life - 4000 operating hours at 60cfm or 8000 hours at 30cfm (replace after a maximum of 2 years)***
- Service period matched to normal compressor routine
- Wall or cabinet mounting (permanent 'quick-fit' plate provided)
- Push-in 'quick' connectors for speed and ease
- Quickest and cleanest possible servicing routine
- Clip-on cap and blanking plug seal the cleaner for transit
- ABS plastic and filter material are re-cyclable
- Lightweight and compact for international bulk shipping
- Dimensions only 145mm x 145mm x 220mm

QUALITY



HOW IT WORKS

1. De-pressurising void and bulk oil removal shred.
2. SILEXA™ final filter medium.
3. Outlet port.
4. Anti-syphon vent.
5. Slot to fit wall bracket (supplied with unit).
6. Handy lid to cover inlet when disposing of used unit comes as part of kit.
7. Inlet.

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
Netherlands

+31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com

OWS 3400/10200/25500/35400


Mid-range separators from 120 to 2500 cfm capacity

- SILEXA™ 'carbon-less' filtration
- Works first time - every time
- 100% performance on most synthetics
- 4000 hours filter life
- Better than 5ppm achieved at installation
- Won't overflow
- Consistent performance
- Simple installation and no pre-soaking
- Low maintenance
- Rapid servicing
- Lightweight handling
- British designed and British built
- 10-year warranty - Terms & Conditions Apply



HOW IT WORKS

1. Generous air vents
2. Quick release lid.
3. Condensate flow.
4. Inlet manifold.
5. Moulded body.
6. Primary filter.
7. Outlet.
8. Test point.
9. SILEXA™ main filter.

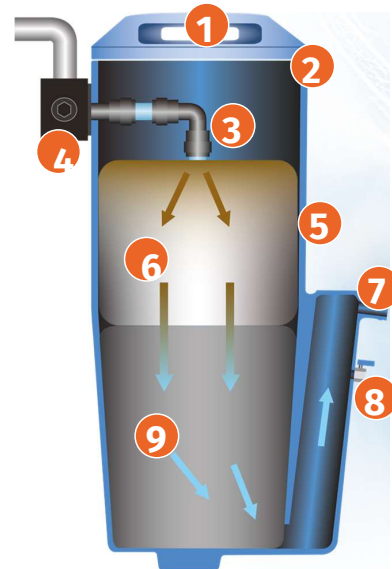

Wall mounting bracket

Useful Wall Mounting Brackets that allow smaller units to be raised off the floor for convenience.

Benefits of wall mounted units:

- Free up valuable floor space
- Less chance of damage from machinery
- Easier height to take test samples from
- Tidier workspace

The SEPURA™ WMB comes in two sizes to fit our SEP 120 and SEP 360 units. It can be ordered in Powder Coated blue finish to match the unit or Stainless Steel.

