

Straight push in fitting

R 1/2" x 12, IPS, stainless steel 316

pneuparts
.com

IPSG1212RVS

MATERIALS:

Body and sleeve: 1.4404,
seals: FKM (cylindrical thread with captive FKM
O-ring, FDA approved), (only silicone-free seals and lubricants are used during
assembly)

TEMPERATURE RANGE:

-20°C to max. +150°C (Ø 16 mm: -15°C to max. +120°C)

OPERATING PRESSURE:

Max. 20 bar

MEDIA:

Compressed air, harmless gases and liquids

*exterior hexagon only





SPECIFICATIONS

ARTICLE NUMBER	D	MALE THREAD (G)	THREAD PROPERTY	WRENCH [SW]
IPSG1212RVS	12mm	R 1/2"	Conical	22



DRAWINGS

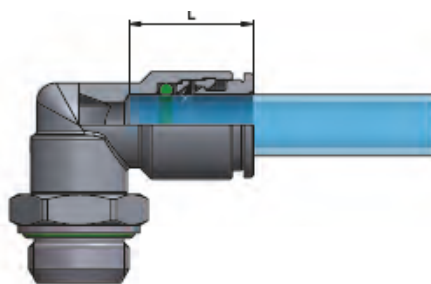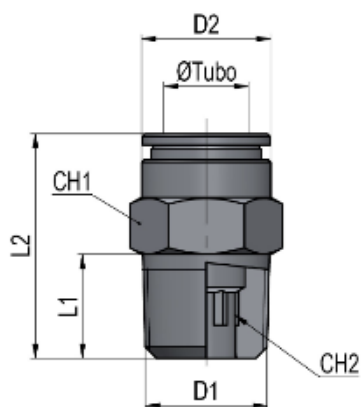

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
The Netherlands

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com