

T push-in coupling

Tapered thread

Temperature range: -20°C to
max. +70°C

Operating pressure: up to max.
18 bar

Vacuum:
-99


PB

T inschroefkoppeling,
conische draad

Swivelling tee, taper

Raccord à té tournant, mâle conique

T-Verschraubung,
schwenkbar und kegelig

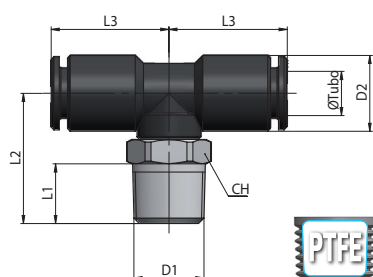

| Type | Ø Tubo | D1 | D2 | L1 | L2 | L3 | CH | gΔ |
|-----------|--------|------|----|------|------|------|----|------|
| PB04C18TL | 4 | R1/8 | 10 | 7,5 | 17 | 15,7 | 10 | 7,4 |
| PB04C14TL | 4 | R1/4 | 10 | 11 | 20,5 | 15,7 | 14 | 13,8 |
| PB06C18TL | 6 | R1/8 | 12 | 7,5 | 18,8 | 20,2 | 12 | 10 |
| PB06C14TL | 6 | R1/4 | 12 | 11 | 23,3 | 20,2 | 14 | 15,2 |
| PB08C18TL | 8 | R1/8 | 14 | 7,5 | 19,5 | 21,7 | 12 | 11,2 |
| PB08C14TL | 8 | R1/4 | 14 | 11 | 24 | 21,7 | 14 | 16,3 |
| PB08C38TL | 8 | R3/8 | 14 | 11,5 | 24,5 | 21,7 | 17 | 21,3 |
| PB10C14TL | 10 | R1/4 | 16 | 11 | 25,5 | 24 | 16 | 19,9 |
| PB10C38TL | 10 | R3/8 | 16 | 11,5 | 26,5 | 24 | 17 | 27 |
| PB12C38TL | 12 | R3/8 | 19 | 11,5 | 28,5 | 28,5 | 20 | 36,3 |
| PB12C12TL | 12 | R1/2 | 19 | 14 | 31,5 | 28,5 | 22 | 44,8 |

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
Nederland

+31 (0)493 763 99
info@pneuparts.com
www.pneuparts.com