

Filters

Pneuparts model series 4

up to 8000 l/min

Version:

Filtering using the centrifugal principal and sintered filter

Materials:

Body: Grivory® (PA 66), spring hood: POM, diaphragms and seals: NBR

Temperature range:

-10°C to max. +50°C

Input pressure:

1.5 - 16 bar (model series 0: 1.5 - 12 bar)

Media:

Compressed air, neutral gases

Advantages:



- Simple assembly of single components using coupling kits within a model series.

Max. condensate amount:

87 cm³

ATEX:

Operating material without its own potential source of ignition in accordance with Direct

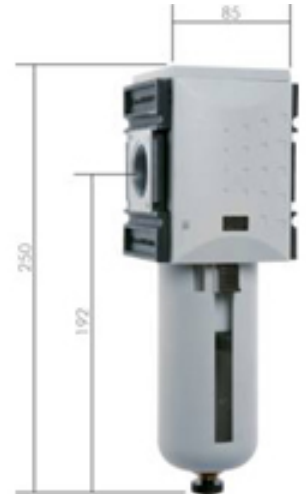

Article code	Thread	Condensate drain	Version
F34F	G 3/4"	Semi-automatic	Standard
F10F	G 1"	Semi-automatic	Standard