

MONOSTAGE NK2




CHARACTERISTICS

Max vacuum degree	[mbar]
Max suction air flow	[l/min]
Air flow consumption	[l/min]
Supply pressure	[bar]
Working Noise level	[dB]
Supply port P	
Vacuum port V1	
Vacuum port V2	
<i>vacuum port V3</i>	
Materials	
Working Temperature	[°C]
Weight	[g]

HOW TO ORDER

Complete vacuum ejector
Complete vacuum ejector with non-return valve


NK2 + CK100

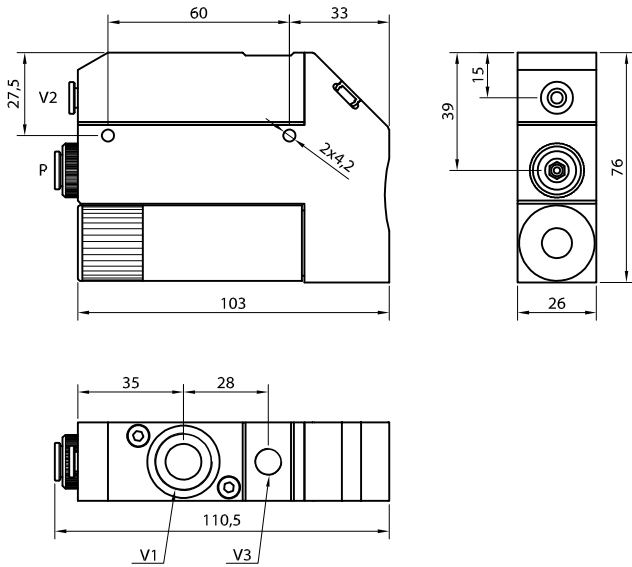

-920
120
100
4-6
75
T8
G1/2"
T6
G1/8"
Al, brass, St. Steel, NBR, PP, PE
-20 70
335

NK2CK100S24C
NK2RCK100S24C

NK2 + CK180

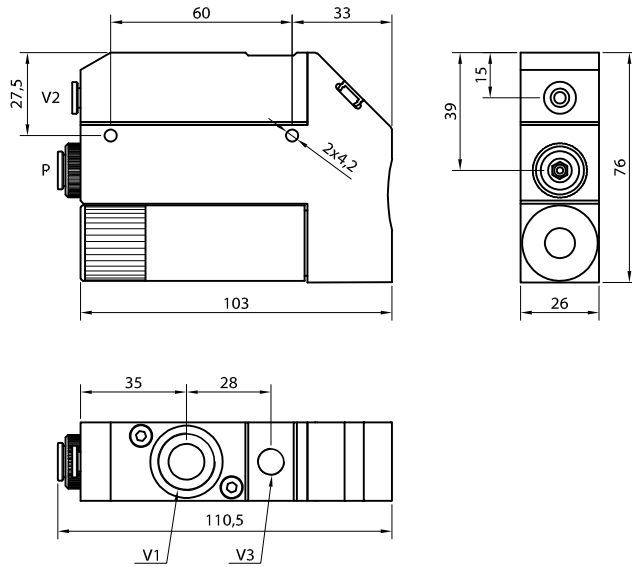

-920
180
160
4-6
75
T8
G1/2"
T6
G1/8"
Al, brass, St. Steel, NBR, PP, PE
-20 70
335













NK2CK180S24C
NK2RCK180S24C

NK2 TECHNICAL DATA

NK2CK100S24C
NK2RCK100S24C

NK2CK180S24C
NK2RCK180S24C

	[mbar]		
Evacuation time* [s]	-100	1	0,5
	-200	2,3	1,1
	-300	3,9	2,1
	-400	5,8	3,2
	-500	8,3	4,8
	-600	11,8	7,7
	-700	17,4	12
	-800	29,1	21
	-900	63,9	47,2

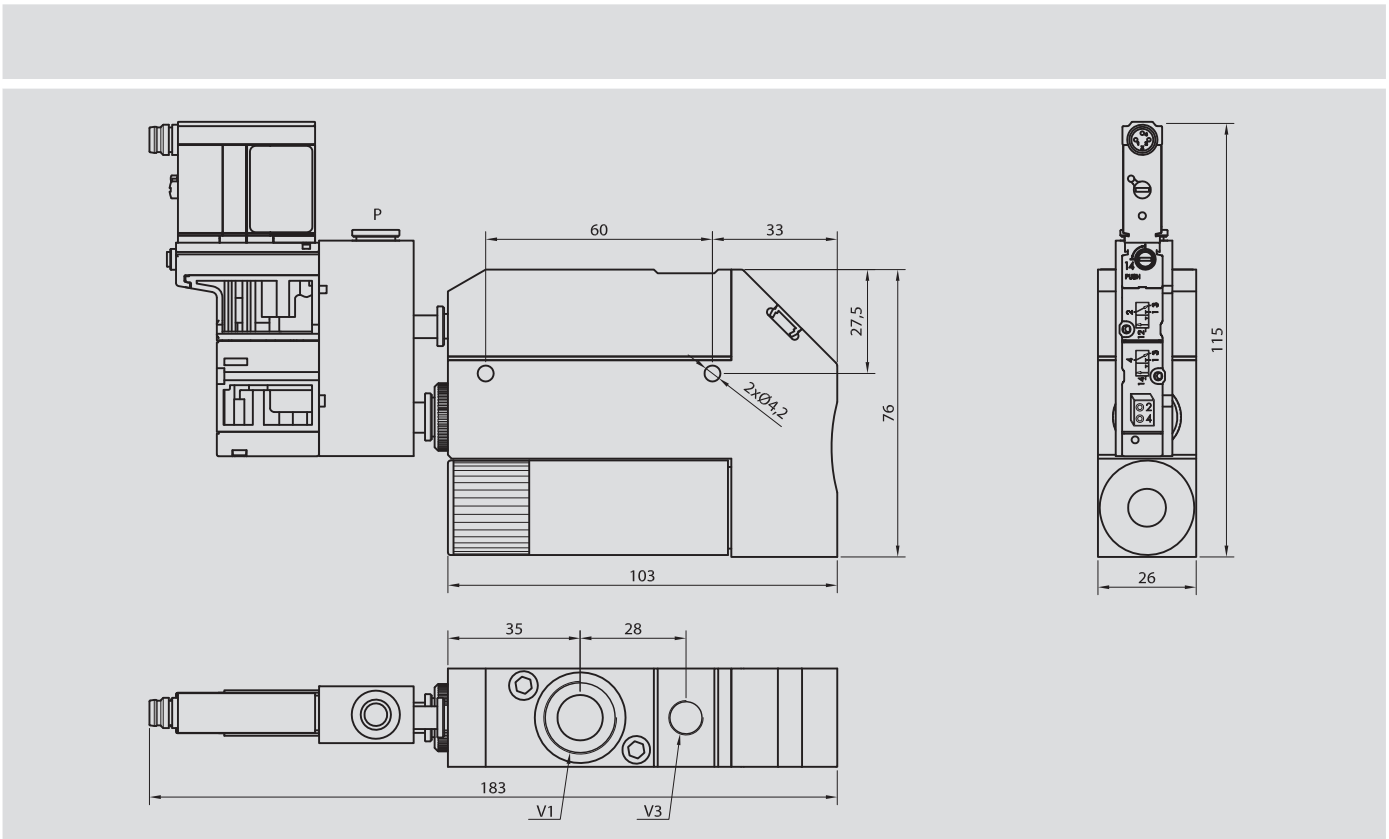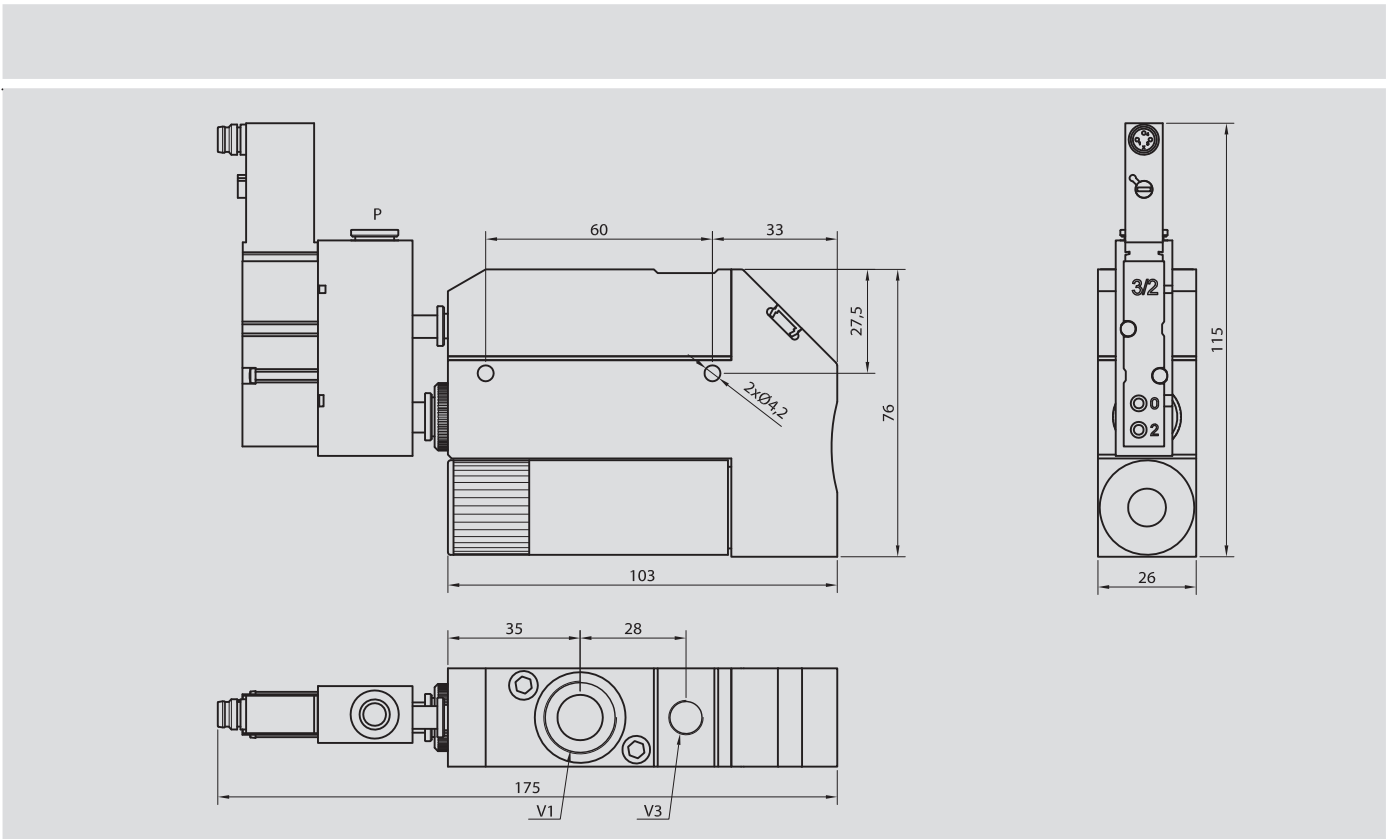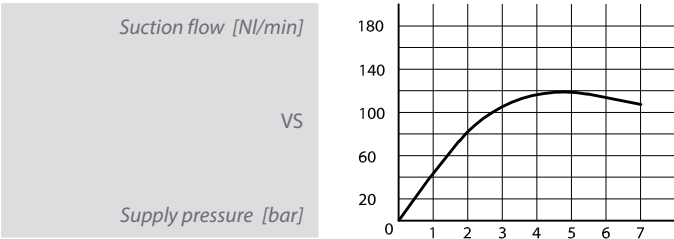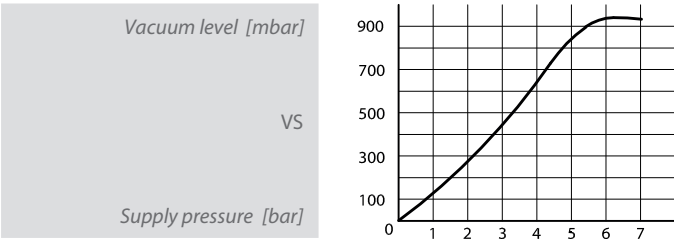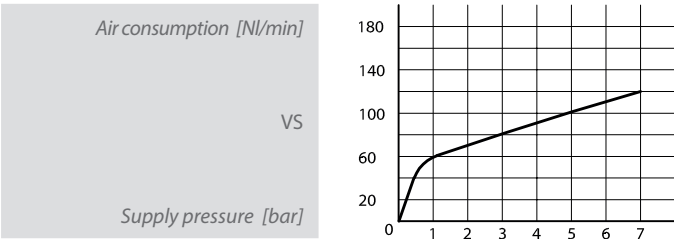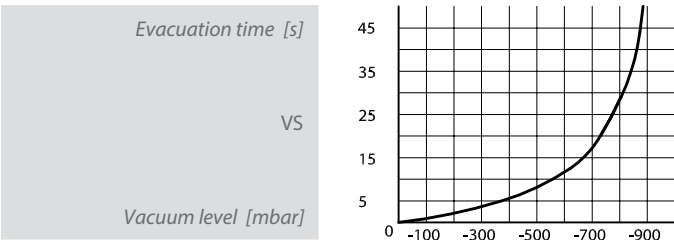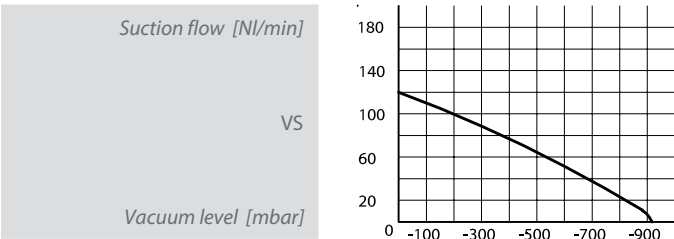

VACUUM GENERATOREN - VENTURI'S
VACUUM GENERATORS

CARTRIDGE
MONOSTAGE

CK




SPECIFICATIES • CHARACTERISTICS

Max. vacuum niveau	Max vacuum degree	[mbar]
Max. zuigvolume	Max suction air flow	[l/min]
Perslucht verbruik	Air flow consumption	[l/min]
Werkdruk	Supply pressure	[bar]
Perslucht aansluiting	Supply port	
Materialen	Materials	
Temperatuur	Working Temperature	[°C]
Gewicht	Weight	[g]


BESTELLEN • HOW TO ORDER

Bestelcode vacuum cartridge
Ordering reference of vacuum cartridge


CK 20

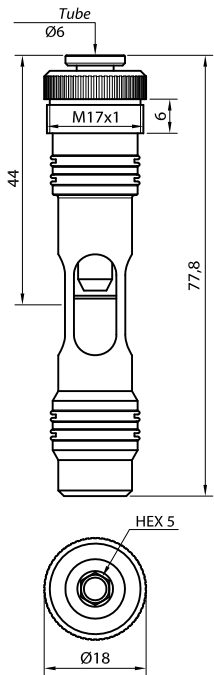


CK 40

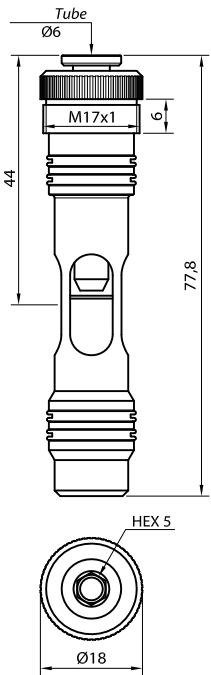


CK 60

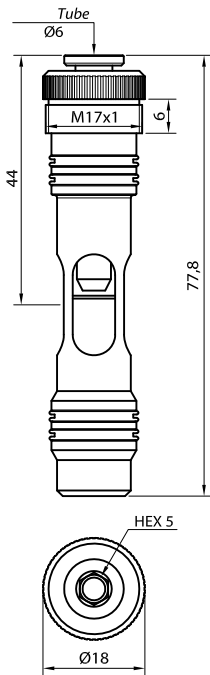

CK 100

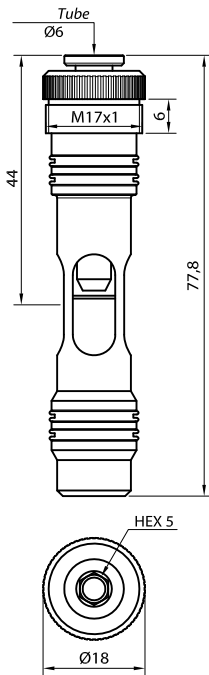

CK 180

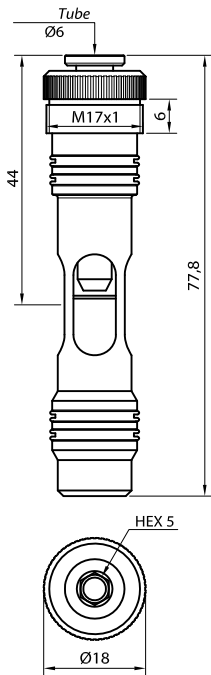

-920	-920	-920	-920	-920
30	50	75	120	180
20	40	60	100	180
4 ... 6	4 ... 6	4 ... 6	4 ... 6	4 ... 6
T6	T6	T6	T6	T6
Al, brass, NBR	Al, brass, NBR	Al, brass, NBR	Al, brass, NBR	Al, brass, NBR
-20 / +70 °C	-20 / +70 °C	-20 / +70 °C	-20 / +70 °C	-20 / +70 °C
35	35	36	36	36
CK20	CK40	CK60	CK100	CK180