



# ART. 8430.102

## Hose reels - s. 430 - 440 - 450

Fixed hose reel, s.430, for air-water, 20 bar, with black rubber hose 18 m,  $\varnothing$  3/8"



### FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

### SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | MANUFACTURING INDUSTRY

### CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

| Features                      | UM                | Value                     |
|-------------------------------|-------------------|---------------------------|
| Pressure                      | bar               | 20                        |
| Compatible fluids             |                   | air - water               |
| Swivel joint                  |                   | brass                     |
| Seals                         |                   | Viton®                    |
| Characteristic                |                   | fixed                     |
| Material                      |                   | painted steel             |
| Couplings                     |                   | zinc plated steel         |
| Hose                          |                   | 995.218                   |
| $\varnothing$ and hose length | $\varnothing$ - m | 3/8" - 18                 |
| Inlet                         |                   | G 1/2" (f)                |
| Outlet                        |                   | G 3/8" (m)                |
| Reel flow path                |                   | brass - zinc plated steel |
| Internal drum width           | mm                | 97                        |


RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135



#### Overall dimensions

---

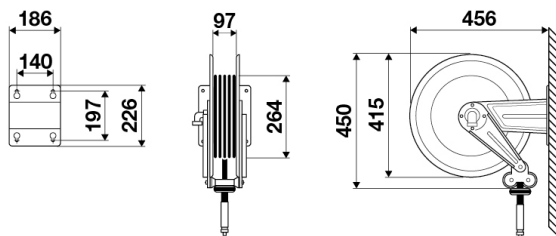

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135