

DISTRIBUTOR

Compressed air condensate distribution

PRODUCT FEATURES

Large compressor systems might require two or more oil/water separators to be installed to match the total compressor capacity of an installation. To connect the oil/water separators together and to ensure an even distribution of condensate in to the oil/water separators, you require the DISTRIBUTOR.

The DISTRIBUTOR ensures an equal distribution of the condensate in to the oil/water separators and the elements are subsequently saturated evenly.

The DISTRIBUTOR has two 1" condensate inlets and six 1/2" outlets with integrated ball valves, allowing you to connect two and up to six oil/water separators.



To service the DISTRIBUTOR simply loosen the 4 top screws and remove the lid. This will give you instant access to the inner working mechanism.

The depressurising chamber ensures compressed air condensate depressurisation and the subsequent distribution into the oil/water separators.

The DISTRIBUTOR is supplied with an installation kit.

COMMERCIAL BENEFITS

- Allows you to connect multiple oil/water separators
- The equal condensate distribution ensures even filter element saturation
- Streamlining of element servicing intervals

TECHNICAL ADVANTAGES

- A guaranteed even distribution in to oil/water separators
- Removable lid, offering quick access to the inner working mechanism, for servicing purpose
- Two 1" condensate inlet and six 1/2" outlet options
- Integrated ball valves allowing local shut-off for servicing purposes
- Supplied with a complete installation kit



DISTRIBUTOR

Compressed air condensate distribution

DIMENSIONS



Wall mounting bracket, fixing material and spirit level included




Easy and quick to service inner working mechanism

TECHNICAL SPECIFICATIONS

Oil/water separator connection points Condensate inlet thread connection Inlet hose connection Condensate outlet thread connection Outlet hose connection Integrated ball valves Housing material Total recyclable Housing colour Installation kit included Installation kit consists of

1" BSP (2 off) 26 mm (hose inner diameter) 1/2" BSP (6 off) 15 mm (hose inner diameter) Yes PP Yes Black Yes

Wall mounting bracket and fixing material, spirit level

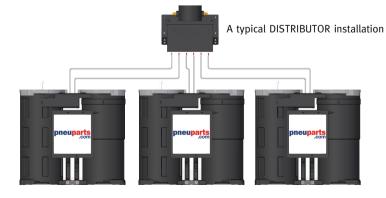

6

Pneuparts.com

Florijn 10 b/c 5751 PC Deurne Nederland Phone: +31 (0)493 763 993

info@pneuparts.com www.pneuparts.com BTW: NL8209.12.931B01 KvK: 17126382 Swift: RABONL24 IBAN: NL23RABO01036.31240