

Distributor

Type Pneuparts

Thread G 1/4" & G 3/8"

Materials:

Body: PA 66 GF60, cover: POM, seals: NBR

Temperature range:

-10°C to +50°C

Media:

Oiled and unoiled compressed air, neutral gasses

Advantages:


• Easy assembly of single components within a model series using coupling kits

Input pressure:

0 - 16 bar (model series 0: 0 - 12 bar)

ATEX:

Operating material without its own potential source of ignition in accordance with Directive 2014/34/EU (not model series 0 or distributor with pressure switch)

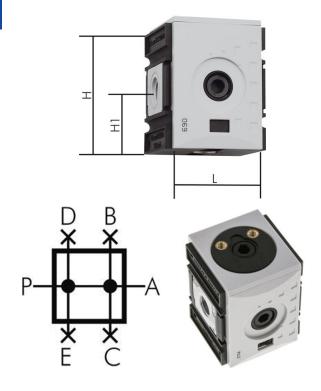

IBAN: NL23RABO01036.31240