


Technical drawings

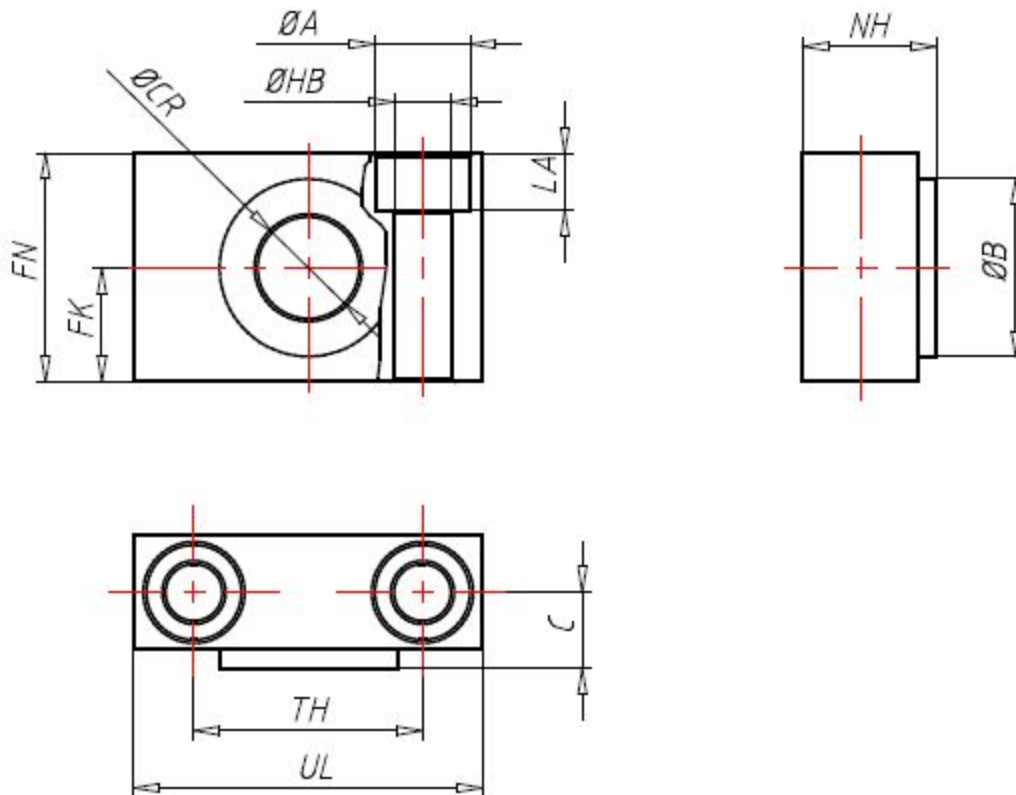

PCG (Packaging)	s - single packaging
DI ($\varnothing$ / mm)	100-125
CR ($\varnothing CR$ / mm)	25
FN (FN / mm)	50
FK (FK / mm)	25
HB ($\varnothing HB$ / mm)	14
A ($\varnothing A$ / mm)	20
LA (LA / mm)	13
TH (TH / mm)	50
C (C / mm)	16
UL (UL / mm)	75
NH (NH / mm)	28.5
B ($\varnothing B$ / mm)	39