

Shut-off valve

With coolant hose connection

Connection on both sides

Sleeve, adjustable coolant hose, 1/4"

Materials:

POM

Flow:


up to 15.4 l/min

Suitable:

This system is suitable for conducting petroleum products, coolants, chemicals and dielectric of EDM machines.

Compatible with the systems: Flexoline, Hydra, Kümli, Loc-Line and Ossmann

Parts compatible with the systems: Snaploc, Lubecool, Vario and Maxiflex

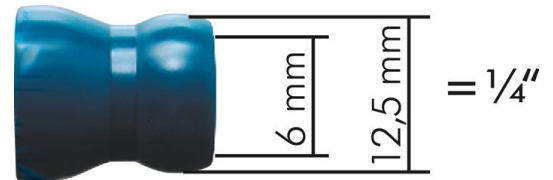

Article code	Material	Flow	Weight
SCWACH141	POM	Up to 15.4 l/min	6.9 g