

2/2 - way solenoid valve

Normally open - Direct acting

Brass

ITEM DESCRIPTION

Function:

Solenoid valve 2/2 way Direct, N.O.

Material:

Housing: Brass CW617N Sealing: NBR, FPM, EPDM, PTFE

DN:

2 - 5

Coils:

24VDC: Pressure: 0 to 9


230AC: Pressure 0 to 9

KV:

0,25



Pictogram

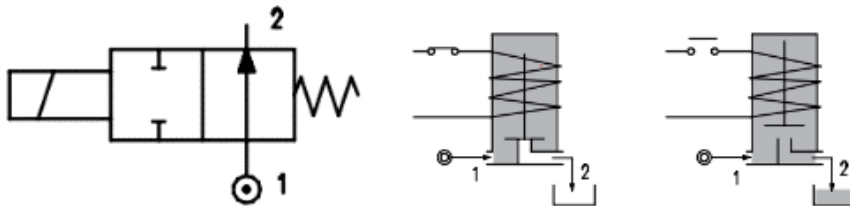

DESCRIPTION

- Solenoid valve 2 ways, direct acting type.
- Brass body
- Switching-On time 25ms.
- Switching-Off time 10ms.

FEATURES

- Maximum allowable pressure: 100bar*
- Maximum fluid viscosity: 27cSt (mm²/s)
- Ambient temperature: with class F coil -10°C +55°C -with class H coil -10°C +80°C
- Above 80°C consult our tech department for the application fine tuning
- Universal mounting position

CONSTRUCTION

- Body: Brass
- Armature tube: Stainless steel Aisi 303
- Plunger and core: Stainless steel
- Springs: Stainless steel Aisi 302
- Seal material: NBR - FPM - EPDM

OPTIONS

- Electroless nickel plating
- Others on request

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
Netherlands

+31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com