

# 2/2 - way solenoid valve

Normally closed & open - direct acting

**pneuparts**  
.com

**DN 2,2 & 16**

## ITEM DESCRIPTION

### Functioning

Solenoid Valve 3/2 ways, direct acting,  
Normally closed (NC) - normally open (NO)

### Body Material

Brass, seal: NBR, FKM or EPDM

### Pipe size

G1/8" - G1/4" - G1/2"

### Nominal diameter (DN)

From 2,2mm to 16mm

### KV

From 2,4 to 70 l/min

### Temperature range

-10 °C to max. +90 °C (types G 1/8" and G 1/4":  
-10 °C to max. +130 °C), ambience: max. +50 °C

### Media

- Compressed air
- Neutral low-viscosity media
- Neutral gases
- Heating oil
- Water
- Other media on request

### Control voltages:

Standard: 24 V DC, 230 V AC, upon request other voltages

### Voltage tolerance:

± 10 %

### Protection class:

IP 65

### Information:

These valves are always supplied with a solenoid coil and a connector plug.


### Warning:

*Servo-controlled valves require a minimum pressure difference between the inlet and outlet to open or close. If little or no medium flows at the outlet due to pressure compensation, the valve may operate unreliably.*




## PICTOGRAM NC - DIRECT ACTING

Normally closed

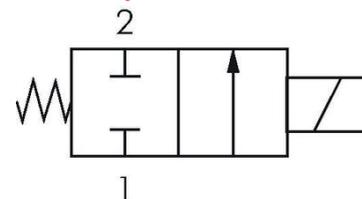

Normally open

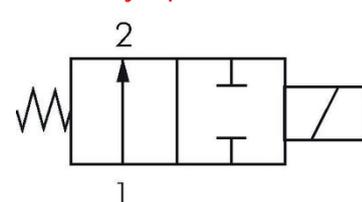

**pneuparts.com**

Florijn 10 b/c  
5751 PC, Deurne  
Netherlands

+31 (0)493 763 993  
sales@pneuparts.com  
www.pneuparts.com