


3/2 magneetventiel / 3
3/2 way valve /3

pneumatisch bediend
pneumatically operated

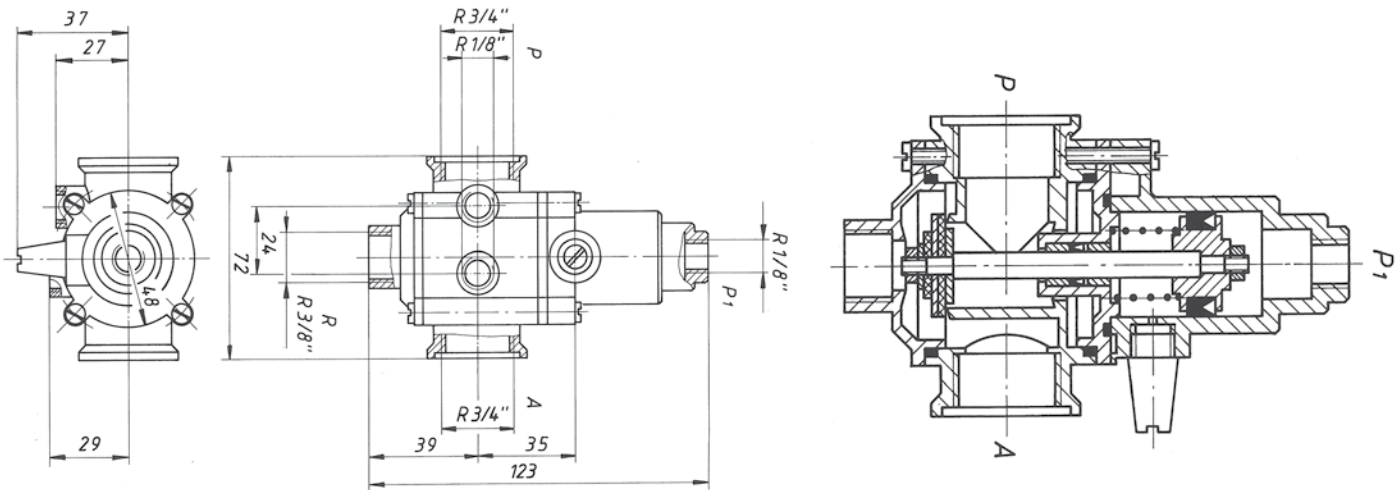

SPECIFICATIES · CHARACTERISTICS

Spanning	5 W	5 VA	5 VA		
Stroomverbruik	0,208 A	0,208 A	0,023 A		
Standaard stuurspanning	24 Volt/DC	24 Volt/AC	230 Volt /AC		
Aansturing <i>driving</i>	pneumatically operated	pneumatically operated	pneumatically operated		
Diameter <i>diameter</i>	20 mm	20 mm	20 mm		
Aansluiting P <i>connection</i>	G 3/4"	G 3/4"	G 3/4"		
Aansluiting A <i>connection</i>	G 3/4"	G3/4"	G 3/4"		
Aansluiting R <i>connection</i>	G 3/8"	G 3/8"	G 3/8"		
Bedienings poort <i>operating port</i>	binnendraad G 1/8"	binnendraad G 1/8"	binnendraad G 1/8"		
Functie <i>fuction</i>					
Werkdruk <i>pressure</i>	4-8 bar	4-8 bar	4-8 bar		
Omgevingtemperatuur <i>temperature</i>	max 80°C	max 80°C	max 80°C		
Bescherming voor <i>protective for</i> DIN 40050	[IP 00]				
	VV3-3-34-24V	VV3-3-34-24VAC	VV3-3-34-230VAC		

BESTELLEN · HOW TO ORDER