

3-part air units

Pneuparts model series

up to 800 l/min

Version:

Filter, self-relieving pressure regulator, with attached lubricator

Materials:

Body: Grivory® (PA 66), spring hood: POM, diaphragms and seals: NBR

Temperature range:

-10°C to max. +50°C

Input pressure:

1.5 - 16 bar (model series 0: 1.5 - 12 bar)

Pressure gauge connection:

1/4"

Media:

Compressed air, neutral gases

Advantages:

- Automatic venting in the event of overpressure on the secondary side
- Easy assembly of individual components using coupling kits within a model series.
- Hand wheel can be locked by pressing down on it and bolted with a lock - please use the VHS 20•
- Semi-automatic oil filling by attaching a hose to the bottom on the oil bowl (G 1/8"). When the oil fill button is pressed, oil from the container will be sucked through the hose (not model series 0).

Max. condensate amount:

16 cm³

Switch panel thread:


M 30 x 1,5

Max. condensate amount:

16 cm³

Switch panel thread:

M 30 x 1,5

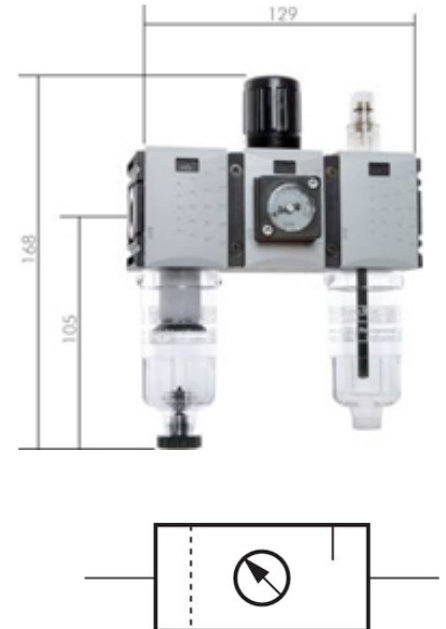

Article code	Thread	Pressure gauge display	Orifice DN	Regulation area	Condensate drain
CL01434F	G 1/4"	0 - 6 bar	800 L/min.	0.2 - 4 bar	Semi-automatic
CL01434FB	G 1/4"	0 - 6 bar	800 L/min.	0.2 - 4 bar	Semi-automatic
CL0143F	G 3/8"	0 - 12 bar	800 L/min.	0.5 - 8 bar	Semi-automatic
CL0143FB	G 3/8"	0 - 12 bar	800 L/min.	0.5 - 8 bar	Semi-automatic
CL014310F	G 1/2"	0 - 12 bar	800 L/min.	0.5 - 10 bar	Semi-automatic
CL014310FB	G 3/4"	0 - 12 bar	800 L/min.	0.5 - 10 bar	Semi-automatic