

Hafner | 5/2-way solenoid valves

Electrically operated

pneuparts
.com

Monostable

SPECIFICATIONS

Supplied without solenoid coil and plug, you need to order these separately.

Function:

5/2-way solenoid valve, monostable

Materials:

Housing: Aluminium
Seals: NBR

Temperature range:

-10 °C to max. +50 °C

Operating pressure:

2 - 10 bar

Medium:

Filtered compressed air

Switching time:

<50 ms (at 6 bar)

Voltage tolerance:

±10%


Power consumption:

3 W / 5 VA

Insulation class:

Class F

Symbol:

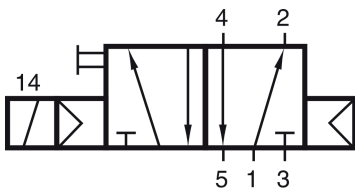


pneuparts.com

Florijn 10 b/c
5751 PC, Deurne
Netherlands


+31 (0)493 763 993
sales@pneuparts.com
www.pneuparts.com

DIMENSIONS


G 1/8"

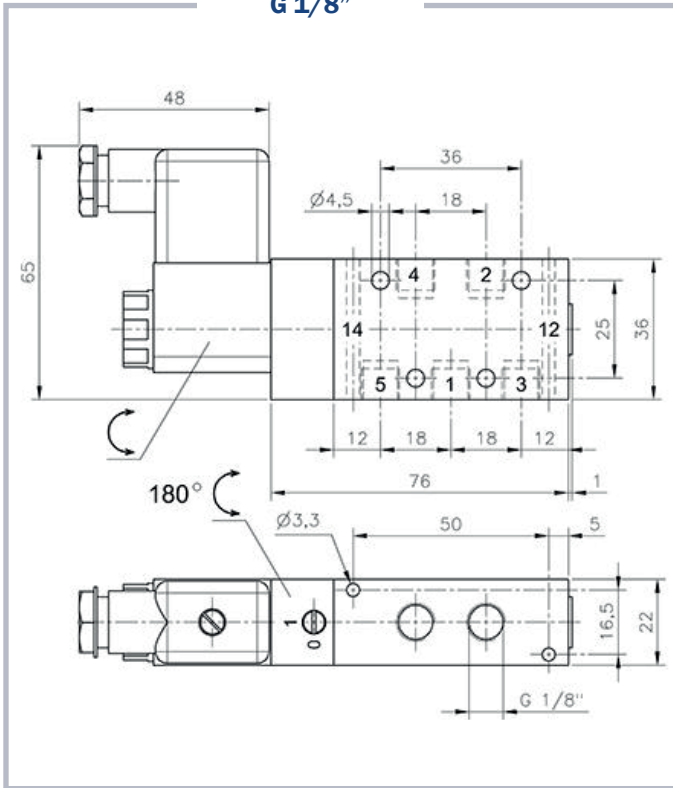


G 1/4"

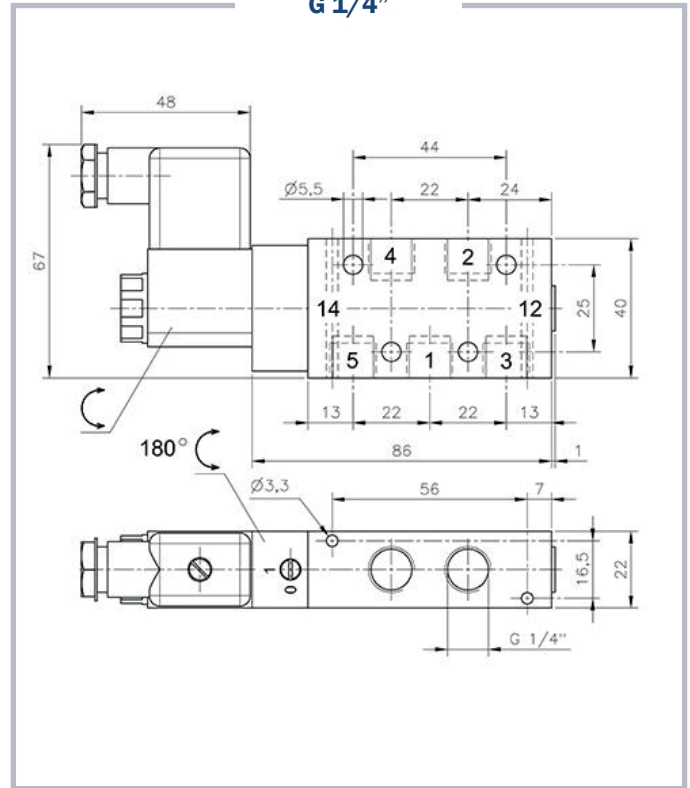

G 3/8"

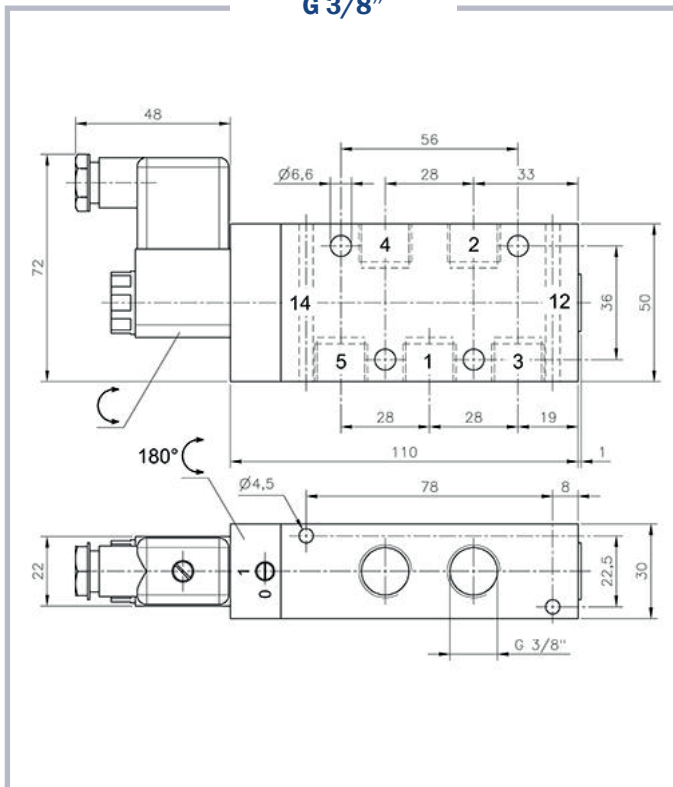

G 1/2"

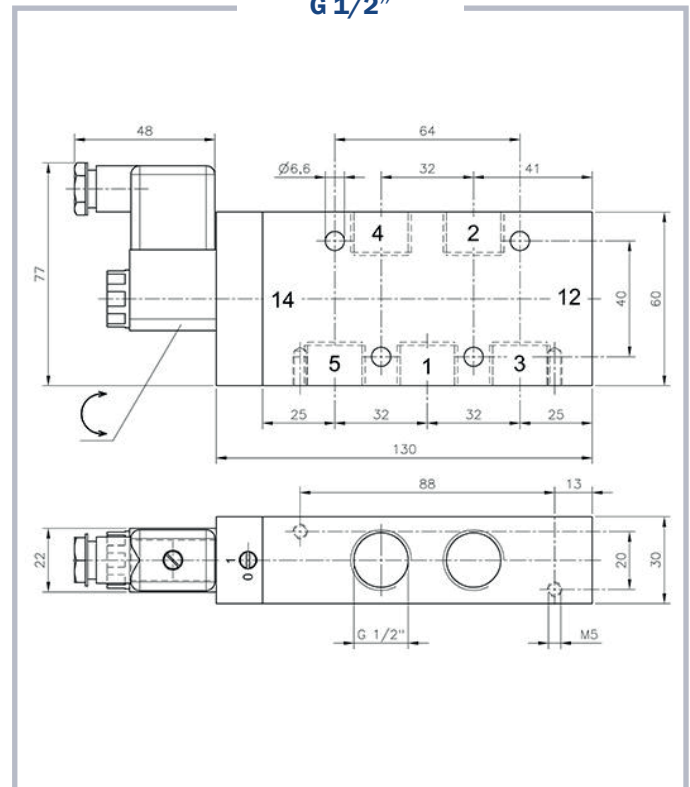

DIMENSIONS

