


Technical drawings

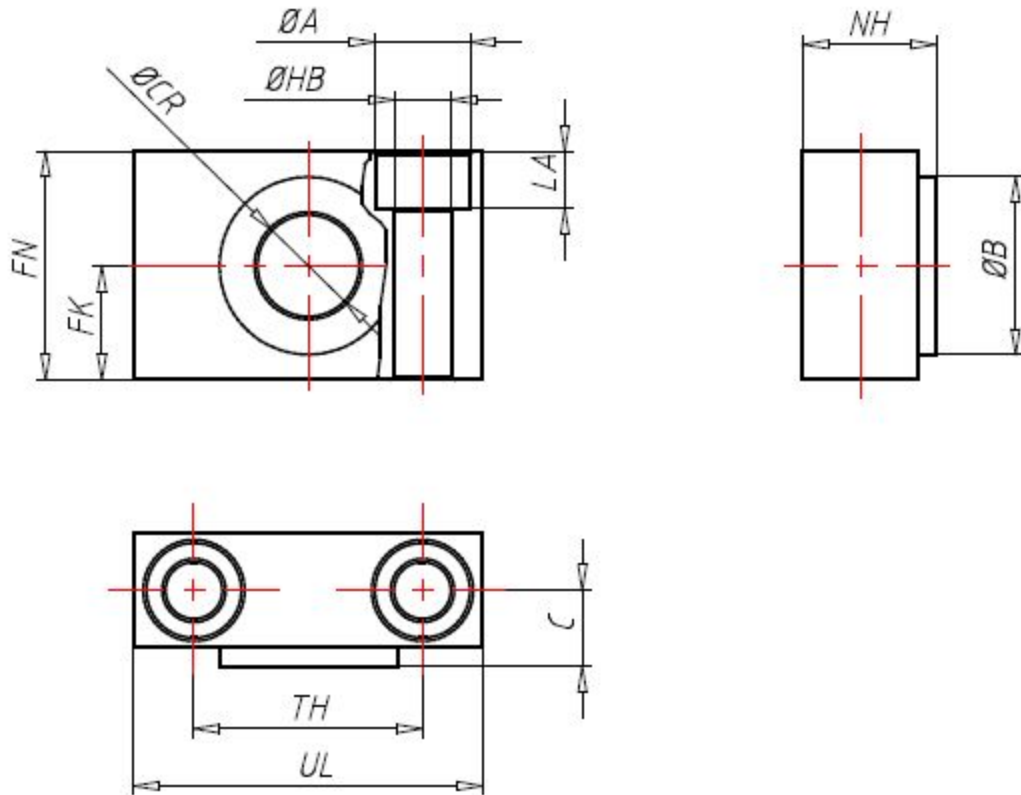

PCG (Packaging)	5 - single packaging
DI ($\varnothing$ / mm)	160-200
CR ($\varnothing CR$ / mm)	32
FN (FN / mm)	60
FK (FK / mm)	30
HB ($\varnothing HB$ / mm)	17.7
A ($\varnothing A$ / mm)	26
LA (LA / mm)	17
TH (TH / mm)	60
C (C / mm)	22.5
UL (UL / mm)	92
NH (NH / mm)	40
B ($\varnothing B$ / mm)	48