

OF valves

Standard version

OF14

ITEM DESCRIPTION

OF valves are used when two valves need to operate the same equipment. The signal, regardless of which of the two valves it comes from, is received by the pendulum valve and transmitted to the device to be controlled.

FEATURES

MATERIALS

Body: Anodised Aluminium Al2011
Cartridge: Brass UNI EN 12164
Seals: NBR
Ball: Stainless steel AISI 420





TEMPERATURE RANGE:

-20°C to 80°C

WORKING PRESSURE:

2 to 10 bar

GUIDELINES:

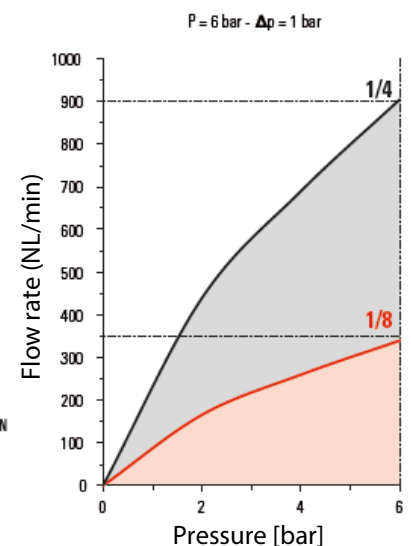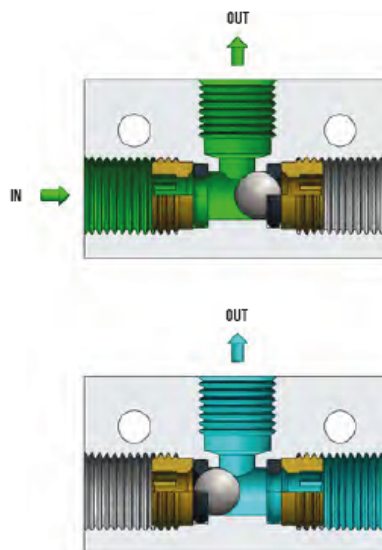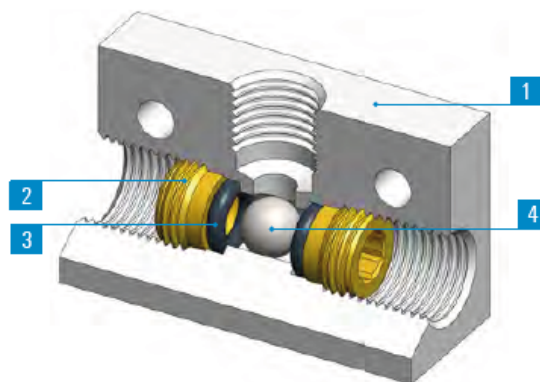

SPECIFICATIONS

ARTICLE SPECIFICATIONS

ARTICLE NUMBER	THREAD (D1)	DIAMETER (D2)	LENGTH (L1)	LENGTH (L2)	LENGTH (L3)	S
OF14	G 1/4"	5,5	30	52	35	20

