

Mini-ball valves with toggle grip on one side

compact, EN 331, PN 20

With Female thread and Female-Male thread

Materials:

Housing: chrome-plated brass, ball: chrome-plated brass, seal: PTFE / NBR

Temperature range:

-20°C to +80°C


Operating range:

Water (no steam), neutral, gaseous and non-aggressive, liquid media, mineral oils, compressed air, vacuum (max. -0.99 bar)




ARTICLE NR.	Version	Female thread (G)	Female/ male thread (G2)	DN (mm)	L (mm)	PN (bar)	H (mm)	R (mm)
BVM18F	Female - Female thread	Rp 1/8"	F- Rp 1/8"	6	36	-0.99 to 20	21	19
BVM14F	Female - Female thread	Rp 1/4"	F- Rp 1/4"	6	43	-0.99 to 20	21	19
BVM38F	Female - Female thread	Rp 3/8"	F- Rp 3/8"	8	47	-0.99 to 20	22	19
BVM12F	Female - Female thread	Rp 1/2"	F- Rp 1/2"	10	59	-0.99 to 20	31	26
BVM18MF	Female - Male thread	Rp 1/8"	M- R 1/8"	6	36	-0.99 to 20	21	19
BVM14MF	Female - Male thread	Rp 1/4"	M- R 1/4"	6	41	-0.99 to 20	21	19

Version: Female - Female Thread

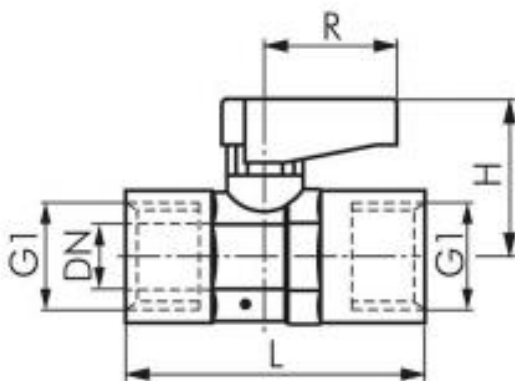

Version: Female - Male Thread

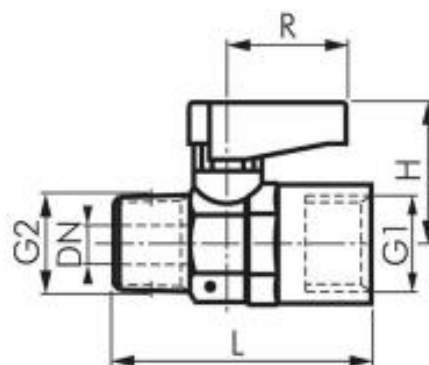

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
Nederland

Phone: +31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com