

Pressure regulator

pneuparts
.com

G 1/2", 0,8 - 8bar

Stainless steel 1.4404 - PR128PRVS

ITEM DESCRIPTION

Flow:

Kv value 1.8m³/h, 2200 l/min* (brass: Kv value 1 m³/h, 1500 l/min*)

Version:

Self-relieving (with secondary vent), optionally non-relieving

Materials:

Seals: FKM, membrane: NBR (PTFE-coated)

Temperature range:

-20°C to +80°C

Media:


oiled and unoled compressed air, non-toxic gasses (with option -NB: Gasses and liquids, demineralised water, with option -NE: aggressive gasses (not for piston type regulator), with option -CO: CO₂ (only for brass type)

Pressure gauge connection:

G 1/4"

Switch panel thread:

M 50x1,5



PROPERTIES

Version:

Standard

Materials:

Stainless steel 1.4404

Thread:

G 1/2"


Pressure regulation range [bar]:

0.5 - 8

Input pressure [bar]:

Max. 30

DIMENSIONS

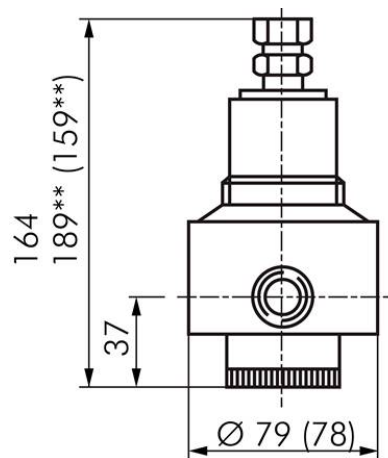

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
Nederland

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com

BTW: NL8209.12.931B01

KvK: 17126382

Swift: RABONL24

IBAN: NL23RABO01036.31240