

2/2 - way solenoid valve

Normally closed & open - indirect acting

pneuparts
.com

DN 13 & 50

ITEM DESCRIPTION

Functioning

Solenoid Valve 2/2 ways, indirect acting,
Normally closed (NC) and normally open (NO)

Body Material

Brass, seal: NBR, FKM or EPDM

Pipe size

G 3/8" - G 1/2" - G 3/4" - G 1" - G 1 1/4" -
G 1 1/2" - G 2"

Nominal diameter (DN)

From 13mm to 50mm

KV

From 55 to 540 l/min

Temperature range

-10 °C to max. +90 °C (types G 1/8" and G 1/4"
-10 °C to max. +130 °C), ambience: max. +50 °C

Media

- Compressed air
- Neutral low-viscosity media
- Neutral gases
- Heating oil
- Water
- Other media on request

Control voltages:

Standard: 24 V DC, 230 V AC, upon request other voltages

Voltage tolerance:

± 10 %

Protection class:

IP 65

Information:

These valves are always supplied with a solenoid coil and a connector plug.


Warning:

Servo-controlled valves require a minimum pressure difference between the inlet and outlet to open or close. If little or no medium flows at the outlet due to pressure compensation, the valve may operate unreliably.




PICTOGRAM NC - DIRECT ACTING

Normally closed

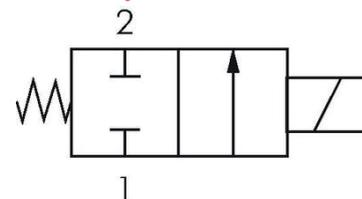

Normally open

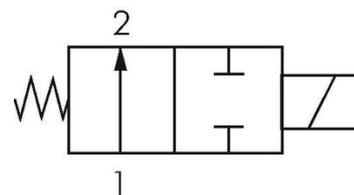

pneuparts.com

Florijn 10 b/c
5751 PC, Deurne
Netherlands

+31 (0)493 763 993
sales@pneuparts.com
www.pneuparts.com