


Pneumatic cylinder

Double acting

ISO 1552

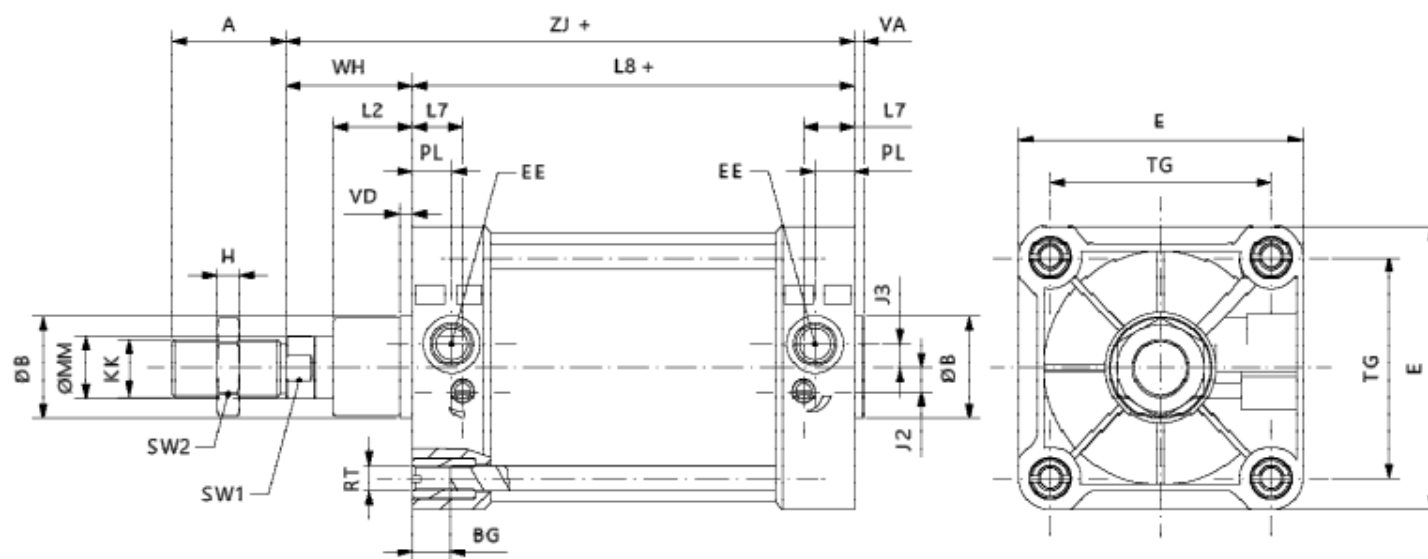

Ø	ØMM	KK	A	ØB	VD	VA	L2	RT	BG	H	SW2	TG	EE	PL	WH	L8	E	SW1	L7	ZJ	J2	J3
160	40	M36x2	72	65	8	6	50	M16	24	14	55	140	3/4 G	25	80	180	180	36	32	260	15	15
200	40	M36x2	72	75	25	6	65	M16	24	14	55	175	3/4 G	25	95	180	220	36	34	275	15	15
250	50	M42x2	84	90	25	8	75	M20	25	20	65	220	1 G	30	105	200	270	46	40	305	25	25
320	63	M48x2	96	110	25	10	90	M24	28	17	75	270	1 G	30	120	220	350	55	45	340	35	35

+ plus stroke length