

Solenoid coils for Pneuparts solenoid valves

Direct

30 mm

DESCRIPTION

Construction - Encapsulation:

Class F: Glass Fiber Reinforced Nylon

Class H: Glass fiber reinforced polyester

Magnetic circuit: Galvanized steel

Windings: Class H insulated copper wires

Ambient temperature:

Class F: -10°C +55°C

Class H: -10°C +80°C

Electrical connection:

According to DIN 43650 B


Options:

- Special capacities on request
- Special voltages on request



ARTICLE CODE	VOLTAGE	AMPERE
COIL3013110AC	110V AC	15 VA mA
COIL301312DC	12V DC	10 W mA
COIL3013230AC	230V AC	15 VA mA
COIL301324AC	24V AC	15 VA mA
COIL301324DC	24V DC	10 W mA

DRAWING:

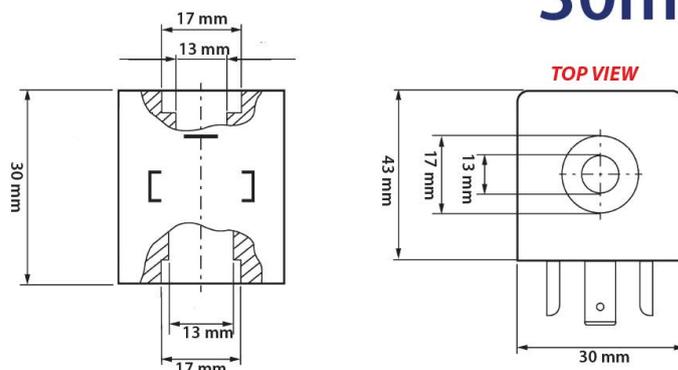

30mm

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
Nederland

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com

BTW: NL8209.12.931B01

KvK: 17126382

Swift: RABONL24

IBAN: NL23RABO01036.31240