


Valves

Hafner 5/3 valves electric pneumatic bistable

Art. code	Voltage
MH532101G24VDC	24VDC
MH532101G24VAC	24VAC
MH532101G110VAC	110VAC
MH532101G230VAC	230VAC
MH532101G	Without coil

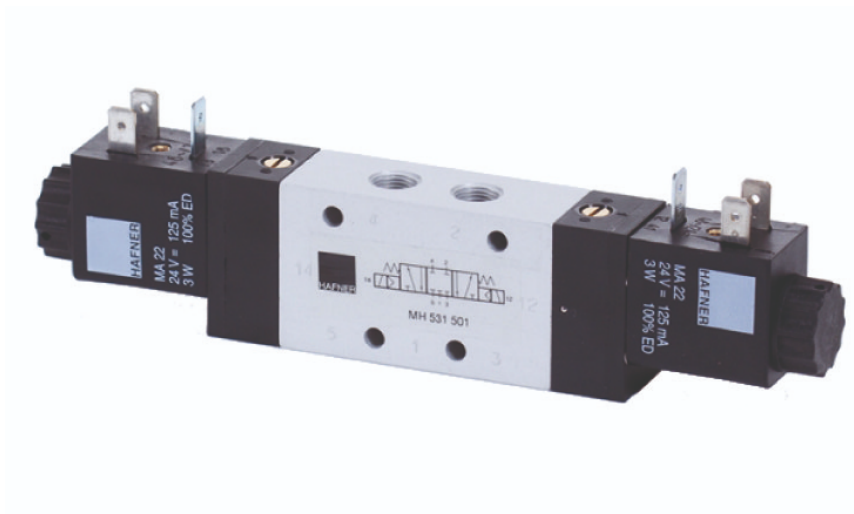

Function: 5/3 centre exhausted

Gate: G 3/8"

Orifice (DN): 2250 mm

Pressure: 1.5- 10 bar

Material: Body: Aluminum, Seals: NBR, Pilot brass & stainless steel. Slide stainless steel

Temperature range: -10 °C to max. + 60 °C.

Medium: Oiled and non-oiled, filtered compressed air.

Switch-on time (at 5 bar): <25 ms.

Control voltage: Standard: 230V 50/60 HZ, 110V/50 Hz, 24V/50 Hz, 24V=, 12V=

Voltage tolerance: +/- 10%.

Power consumption: DC power: 3 W, AC

Power: 5 VA (50 HZ).

