

ZUIGNAPPEN
VACUUM CUPS

ACCESSOIRES
ACCESSORIES

COMPENSATORS




SPECIFICATIES • CHARACTERISTICS

Diameter <i>diameter</i>	[mm]
Verbinding voor zuignap <i>Connection for vacuum cup</i>	
Aansluiting voor vacuüm <i>Connection for vacuum</i>	
Materiaal <i>Materials</i>	
Gewicht <i>Weight</i>	[g]

BESTELLEN • HOW TO ORDER


Compensator met mannelijk aansluiting <i>Compensator with male connection</i>
Compensator met vrouwelijke aansluiting <i>Compensator with female connection</i>
Anti-draai compensator met mannelijke aansluiting <i>Anti-twist compensator with male connection</i>
Anti-draai compensator met vrouwelijke aansluiting <i>Anti-twist compensator with female connection</i>

VCLC824

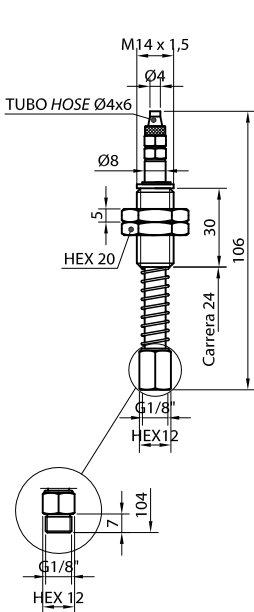


8
G1/8"
T4x6
RVS, Messing, Staal.
74

VCLC1225

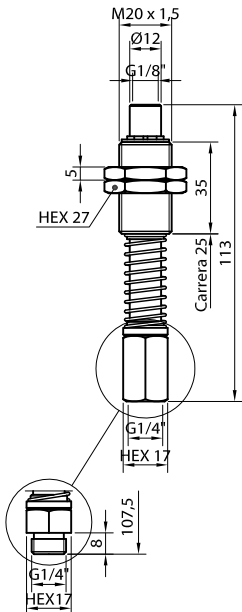


12
G1/4"
G1/8"
RVS, Messing, Staal.
155

VCLC1245

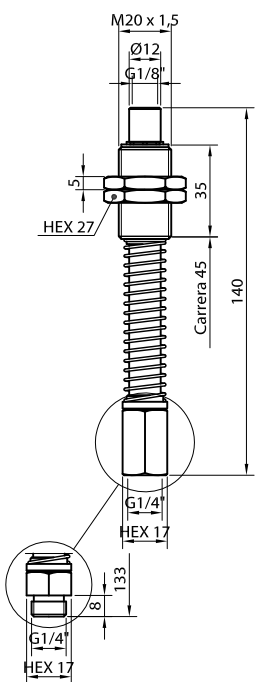


12
G1/4"
G1/8"
RVS, Messing, Staal.
169

VCLC1260

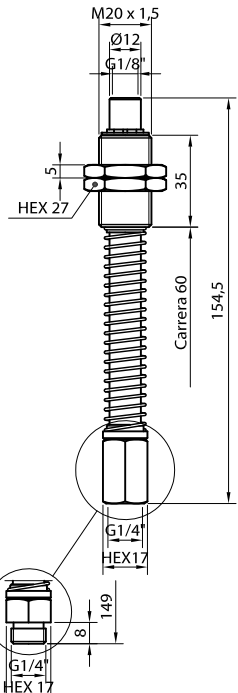

12
G1/4"
G1/8"
RVS, Messing, Staal.
179

VCLC1645

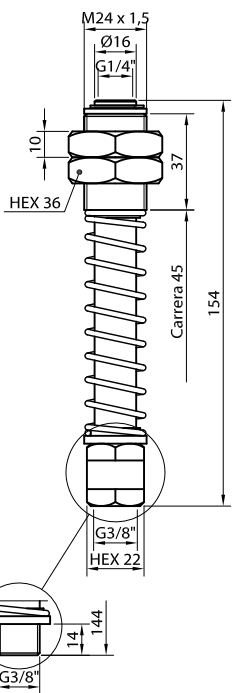

16
G3/8"
G1/4"
RVS, Messing, Staal.
328 / 367

VCLC824M
VCLC824F
VCLC824ATM
VCLC824ATF

VCLC1225M
VCLC1225F
VCLC1225ATM
VCLC1225ATF

VCLC1245M
VCLC1245F
VCLC1245ATM
VCLC1245ATF

VCLC1260M
VCLC1260F
VCLC1260ATM
VCLC1260ATF

VCLC1645M
VCLC1645F
VCLC1645ATM
VCLC1645ATF

INFO

Voor speciale slag vraag Vacupro
For special strokes, ask AR