

L-CK union nut

G 1/2", stainless steel 316

BB12135RVS

MATERIALS:

Body and sleeve: 1.4404,

seals: FKM (cylindrical thread with captive FKM

O-ring, FDA approved), (only silicone-free seals and lubricants are used during assembly)

TEMPERATURE RANGE:

-20°C to max. +150°C (Ø 16 mm: -15°C to max. +120°C)

OPERATING PRESSURE:

Max. 20 bar

MEDIA:

Compressed air, harmless gases and liquids

*exterior hexagon only




SPECIFICATIONS

ARTICLE NUMBER	Thread (G)	L1	L2	L3	CH
BB12135RVS	G 1/2"	7.5	35.5	41.5	26



DRAWINGS

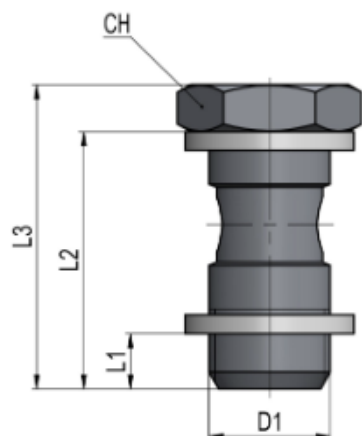

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
The Netherlands

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com