

Prefilters

Futura model series

up to 1500 l/min

Version:

Filtering using the centrifugal principal and sintered filter

Materials:

Body: Grivory® (PA 66), spring hood: POM, diaphragms and seals: NBR

Temperature range:

-10°C to max. +50°C

Input pressure:

1.5 - 16 bar (model series 0: 1.5 - 12 bar)

Media:

Compressed air, neutral gases

Advantages:



- Simple assembly of single components using coupling kits within a model series.

Max. condensate amount:

87 cm³

ATEX:

Operating material without its own potential source of ignition in accordance with Directive 2014/34/EU

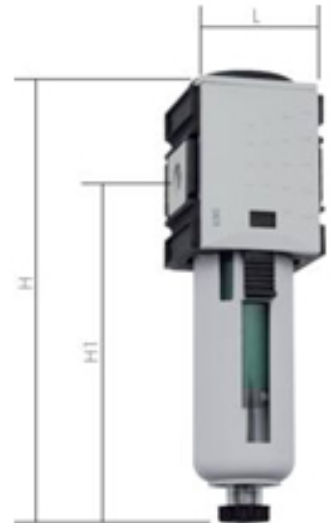

Article code	Thread	Condensate drain	Version	Bowl volumes	Model series
FX014F	G 1/4"	Semi-automatic	Standard	12 cm ³	Series 0
FX14F	G 1/4"	Semi-automatic	Standard	12 cm ³	Series 1
FX38F	G 3/8"	Semi-automatic	Standard	12 cm ³	Series 1
FX382F	G 3/8"	Semi-automatic	Standard	49 cm ³	Series 2
FX12F	G 1/2"	Semi-automatic	Standard	49 cm ³	Series 2
FX34F	G 3/4"	Semi-automatic	Standard	87 cm ³	Series 4
FX10F	G 1"	Semi-automatic	Standard	87 cm ³	Series 4