

Pneudrain ZLA Mini

Electronic zero air loss drain

PRODUCT FEATURES

The Pneudrain ZLA Mini is a zero air-loss drain designed for smaller compressed air applications.

The Pneudrain ZLA Mini incorporates a reliable direct acting valve assembly with FPM seals, offering a pressure range of 0 to 16 bar (up to 230 PSI).

The solid and robust aluminium housing design has also been incorporated in to this model, following suite with the larger KAPTIV models.



With an inlet connection height of only 74mm this is an incredibly compact solution with unrivaled installation versatility and reliability. The weight of the Pneudrain ZLA Mini is only 0.5 kg! The maximum compressor capacity of this drain is 10 m³/min (350 CFM) and typical draining applications include fridge dryers and filters - mainly due to its incredible compact size.

COMMERCIAL BENEFITS

- Extremely compact and lightweight unit
- True zero air-loss solution
- One model covers all compressor capacities up to 10 m³/min.
- No sizing chart required, offering stocking advantages
- The serviceable valve offers maintenance opportunities

TECHNICAL ADVANTAGES

- Zero air-loss during the condensate discharge
- Easy to install due to its low inlet height
- External valve position allows for fast and easy maintenance
- Direct acting valve with FPM seal
- Robust corrosion resistant aluminium housing
- A large integrated mesh strainer
- Incorporating a smart-self-cleaning valve modus

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
Nederland


Phone: +31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com

BTW: NL8209.12.931B01 KvK:
17126382
Swift: RABONL24
IBAN: NL23RABO01036.31240


Pneudrain ZLA Mini

Electronic zero air loss drain

DIMENSIONS

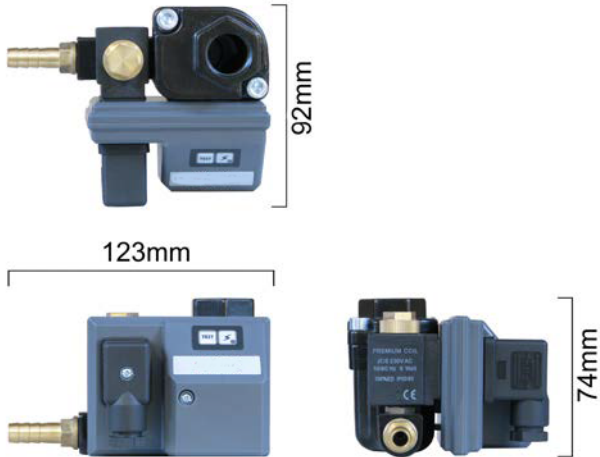

Incredibly compact!

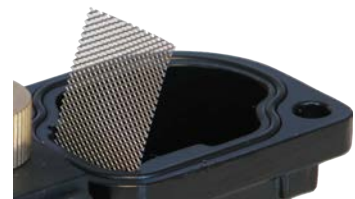

Integrated mesh filter

TECHNICAL SPECIFICATIONS

Max. compressor capacity	10 m ³ /min.
Max. drainage capacity	45 liters condensate per hour at 16 bar 0
Pressure range	- 16 bar
Valve type	2/2 way, direct acting
Valve orifice	2 mm
Valve seals	FPM
Inlet connection	1/2" BSP
Inlet height	7.4 cm
Outlet connection	1/4" BSP

Medium temperature	1	-	50	°C
Ambient temperature	1 - 50 °C			

Supply voltage options	230VAC / 115VAC / 24VAC / 24VDC
Power connector	DIN 43650-B

Serviceable valve	Yes
TEST feature	Yes

Environmental protection	IP65 (NEMA4)
--------------------------	--------------

Integrated mesh strainer	Yes
--------------------------	-----

Housing material	Corrosion resistant aluminium, EP coating
------------------	---



Direct acting valve assembly, offering you reliability



Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
Nederland

Phone: +31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com

BTW: NL8209.12.931B01 KvK:
17126382
Swift: RABONL24
IBAN: NL23RABO01036.31240