

**Electrically operated**

**bistable**

**SPECIFICATIONS**

**Supplied with solenoid coil and plug**

**Function:**

5/2-way solenoid valve, bistable

**Thread:**

G 1/4", G 3/8" and G 1/2"

**Temperature range:**

-5 °C to max. +50 °C

**Switching time:**

30 to 50ms

**Operating pressure range:**

0.2 - 0.8 MPa

**Number of ports:**

5

**Number of positions:**

2

**Voltage:**

AC110V, 220V, 24V (50/60Hz), DC24V, 12V

**Voltage tolerance:**


±10%

**Insulation class:**

Class F



**Symbol:**




**PROPERTY FOR EXPLOSION-PROOF TYPE**


Anti-explosion class	Ex mb IIC T4 Gb
Voltage	AC110V / 220V(50/60)Hz, DC24V
Power consumption	AC110V=4.5VA, AC220V=4.8VA, DC=5W
Available voltage range	±10%
Insulation class	F class
Wire length	3 m

**DIMENSIONS**

**G 1/4"**

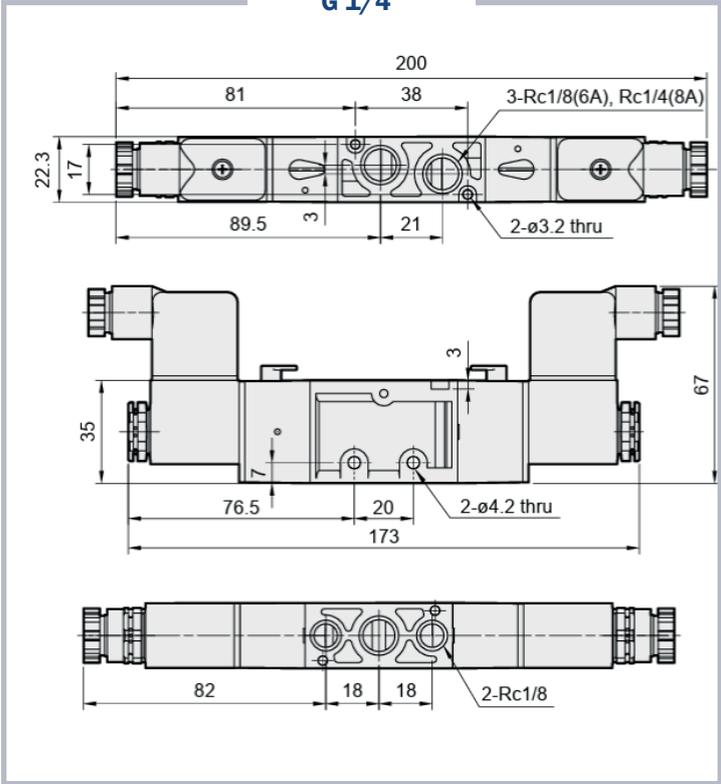

**G 3/8"**

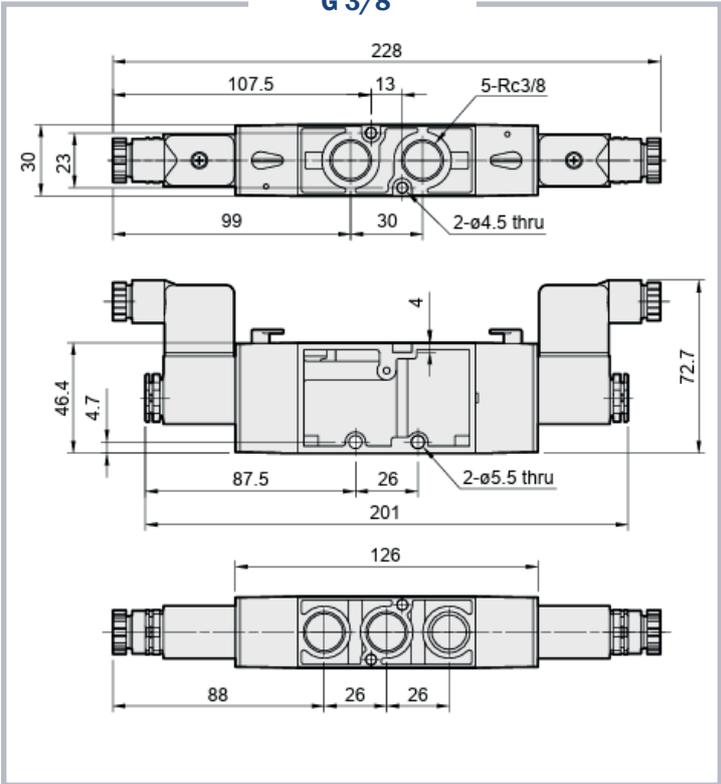

**G 1/2"**

