

bistable

SPECIFICATIONS

Supplied with solenoid coil and plug

Function:

5/2-way solenoid valve, bistable

Thread:

G 1/4", G 3/8" and G 1/2"

Temperature range:

-5 °C to max. +50 °C

Switching time:

30 to 50ms

Operating pressure range:

0.2 - 0.8 MPa

Number of ports:

5

Number of positions:

2

Voltage:

AC110V, 220V, 24V (50/60Hz), DC24V, 12V

Voltage tolerance:


±10%

Insulation class:

Class F



Symbol:




PROPERTY FOR EXPLOSION-PROOF TYPE


| | |
|-------------------------|-----------------------------------|
| Anti-explosion class | Ex mb IIC T4 Gb |
| Voltage | AC110V / 220V(50/60)Hz, DC24V |
| Power consumption | AC110V=4.5VA, AC220V=4.8VA, DC=5W |
| Available voltage range | ±10% |
| Insulation class | F class |
| Wire length | 3 m |

DIMENSIONS

52SV14B220VAC and 52SV14B24VDC

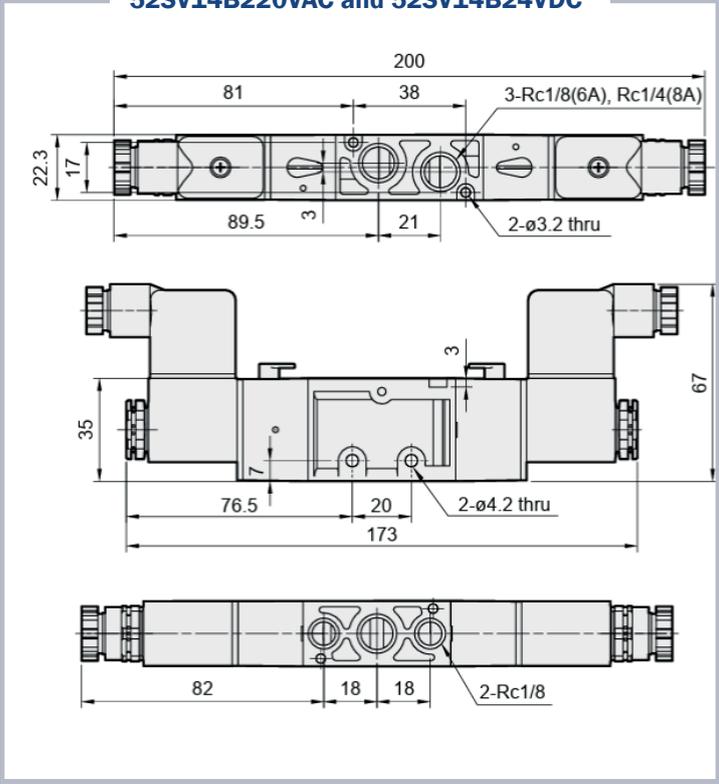

52SV38B220VAC and 52SV38B24VDC

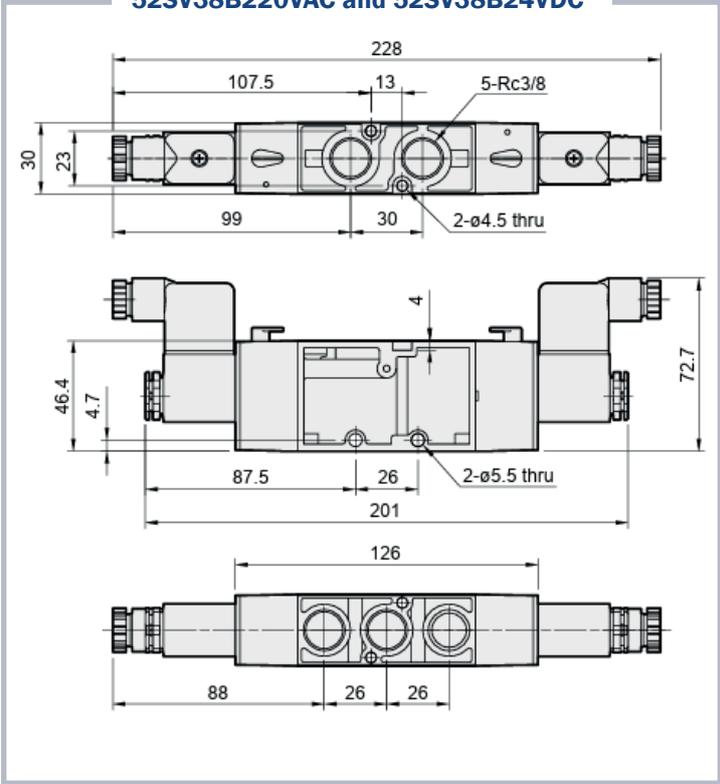

52SV12B220VAC and 52SV12B24VDC

