

# Festo solenoid valve

## G 3/8", Model series VUVS LK30

### Data sheet

**Materials**

Body: Aluminium/ plastic, seals: NBR

**Temperature range:**

-5 ° C to + 50 ° C

**Operating pressure:**

1,5 - 8 bar

**Media:**

Oiled and oil-free compressed air

**Switching time:**

<21 ms

**Control voltages:**

24 V=

**Voltage tolerance:**

± 10%

**Energy consumption:**

3.3 W

**Protection class (VDE 0470/EN60529):**


IP 65, plug size 1

**Warning:**

Valve plug is not included in the scope of delivery. Please order separately! Article number: SPSV0D0C

\* Pneumatic spring

**FESTO**

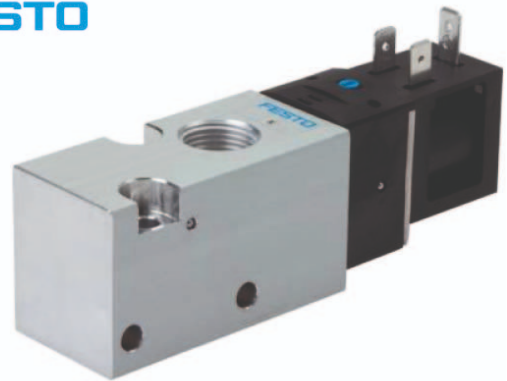

Article nr.	Function	Thread	Workload	Orifice (DN)	Voltage
VUVSLK30M32CADG381B2S	3/2 NC	G 1/4 "	1.5-8 bar	1000 L/min.	24V=
VUVSLK30M52ADG381B2S	5/2 spring return	G 1/4 "	1.5-8 bar	1000 L/min.	24V=
VUVSLK30B52DG381B2S	5/2 impulse	G 1/4 "	1.5-8 bar	1000 L/min.	24V=