

Assembly

Speed control plate can be mounted in any position.

Medium


Filtered air according to PNEUROP / ISO class 4,
other control media on request

Service

Screwdriver

Flow direction:

See symbol below

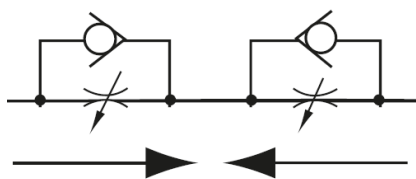

Temperature range from:

-10 ° to + 60 ° C (DC)

Material

Body: Aluminum anodised

Seal: NBR



Hand Knob: Aluminum

Internal parts: Brass

Bar:

Minimum: 0.5 bar

Maximum: 10 bar

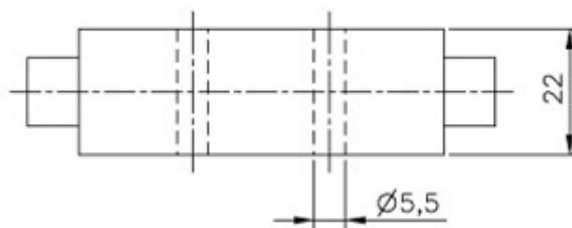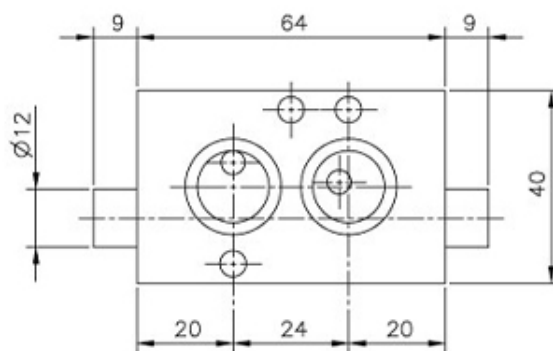

Hafner Screwdriver operated 3/2-way - aluminum post speed control plate

Orifice (DN) connection	Function	Bar min.	Bar max.	Flow (l/min)	Orifice	Sizes			Weight
						L	W	H	
DN 5	3/2	0,5	10	650	5 mm	82	40	22	0,18 g