

VACUUM GENERATOREN - VENTURI'S
VACUUM GENERATORS

CARTRIDGE
MONOSTAGE

CK




SPECIFICATIES · CHARACTERISTICS

Max. vacuum niveau <i>Max vacuum degree</i>	[mbar]
Max. zuigvolume <i>Max suction air flow</i>	[Nl/min]
Perslucht verbruik <i>Air flow consumption</i>	[Nl/min]
Werkdruk <i>Supply pressure</i>	[bar]
Perslucht aansluiting <i>Supply port</i>	
Materialen <i>Materials</i>	
Temperatuur <i>Working Temperature</i>	[°C]
Gewicht <i>Weight</i>	[g]


BESTELLEN · HOW TO ORDER

Bestelcode vacuum cartridge
Ordering reference of vacuum cartridge


CK 20

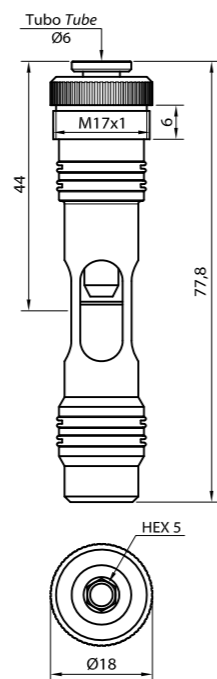


CK 40

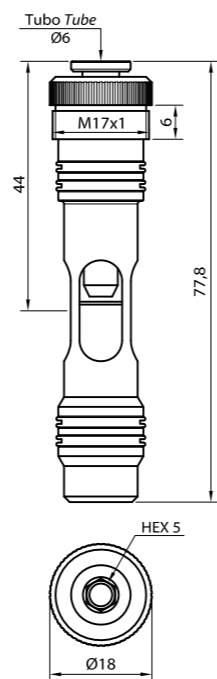


CK 60

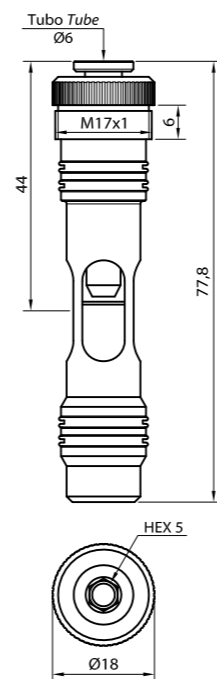

CK 100

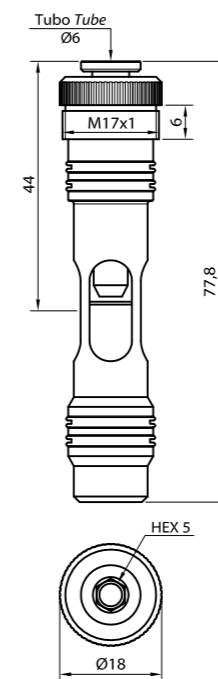

CK 180

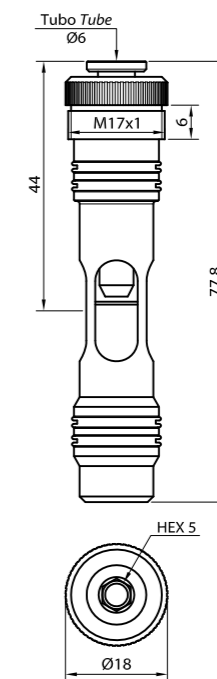

	-920	-920	-920	-920	-920
	30	50	75	120	180
	20	40	60	100	180
	4 ... 6	4 ... 6	4 ... 6	4 ... 6	4 ... 6
	T6	T6	T6	T6	T6
	Alu, Messing, RVS <i>Al, brass, NBR</i>	Alu, Messing, RVS <i>Al, brass, NBR</i>	Alu, Messing, RVS <i>Al, brass, NBR</i>	Alu, Messing, RVS <i>Al, brass, NBR</i>	Alu, Messing, RVS <i>Al, brass, NBR</i>
	-20 / +70 °C	-20 / +70 °C	-20 / +70 °C	-20 / +70 °C	-20 / +70 °C
	35	35	36	36	36
	CK20	CK40	CK60	CK100	CK180