

Bistable

SPECIFICATIONS

Supplied without coil and plug.

Materials:

Body: Aluminium

Seals: NBR

Function:

5/2-way pneumatically operated valve, bistable

Temperature range:

-5 °C to max. +60 °C

Operating pressure:

0 to 8 bar

Pilot pressure:

1 to 8 bar

Effective orifice:


3.8 to 12 mm²

**Depending on type*

Media:

Compressed air, neutral gases

Symbol:

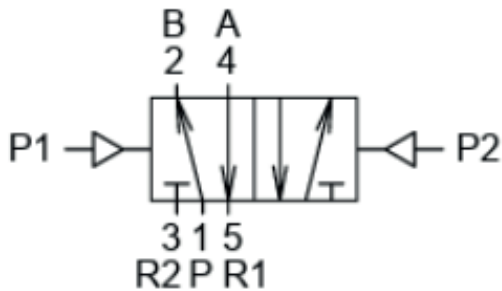

DIMENSIONS

