

2/2 - way solenoid valve

Normally closed - Indirect acting

pneuparts
.com

Brass

ITEM DESCRIPTION

Function:

Solenoid valve 2/2 way Indirect, N.C.

Material:

Housing: Brass CW617N Sealing: NBR, FPM, EPDM, PTFE

DN:

13 - 50

Coils:


24VDC: Pressure: 0,15 to 16

230AC: Pressure 0,15 to 16

KV:

2,5

Pictogram

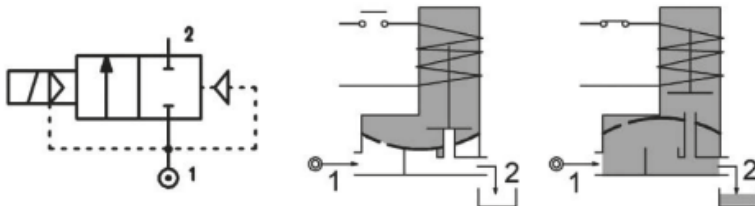

DESCRIPTION

- Solenoid valve 2 ways, indirect acting type.
- Brass body
- Switching-On time 30ms (<1/2"), 50ms (3/4"-1"), 150- 1000ms adjustable (>1 1/4")
- Switching-Off time 50ms (<1/2"), 80ms (3/4"-1"), 150- 1000ms adjustable (>1 1/4")

CONSTRUCTION

- Body: Brass
- Armature tube: Stainless steel Aisi 303
- Plunger and core: Stainless steel 430Fr
- Springs: Stainless steel Aisi 302
- Seal material: NBR - FPM - EPDM

FEATURES

- Maximum allowable pressure: 26bar*
- Maximum fluid viscosity: 25cSt (mm²/s)
- Ambient temperature: with class F coil -10°C +55°C -with class H coil -10°C +80°C
- Above 80°C please consult our tech department for the application fine tuning
- Preferred mounting position with vertical coil above

OPTIONS

- Manual override
- Electroless nickel plating Degreased for industrial Oxygen use
- Version for vacuum application (air/gas)
- Others on request

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
Netherlands

+31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com