

-10°C AIR VESSELS

HORIZONTAL
GALVANIZED - ALM

Material

Carbon steel

Fluid content

Compressed air / Nitrogen (group 2)


Finishing

GALVANIZED : internal and external hot-dip galvanization
ALM: External Ral 5015 blue paint (standard) and Internal Ral 5005 ALM paint

Upon request

1" couplings on heads

Directive	2014/29/UE	2014/68/UE(PED)
Operating pressure	11/16 bar	12/16 bar
Operating temperature	-10 +120°C	-10 +50°C

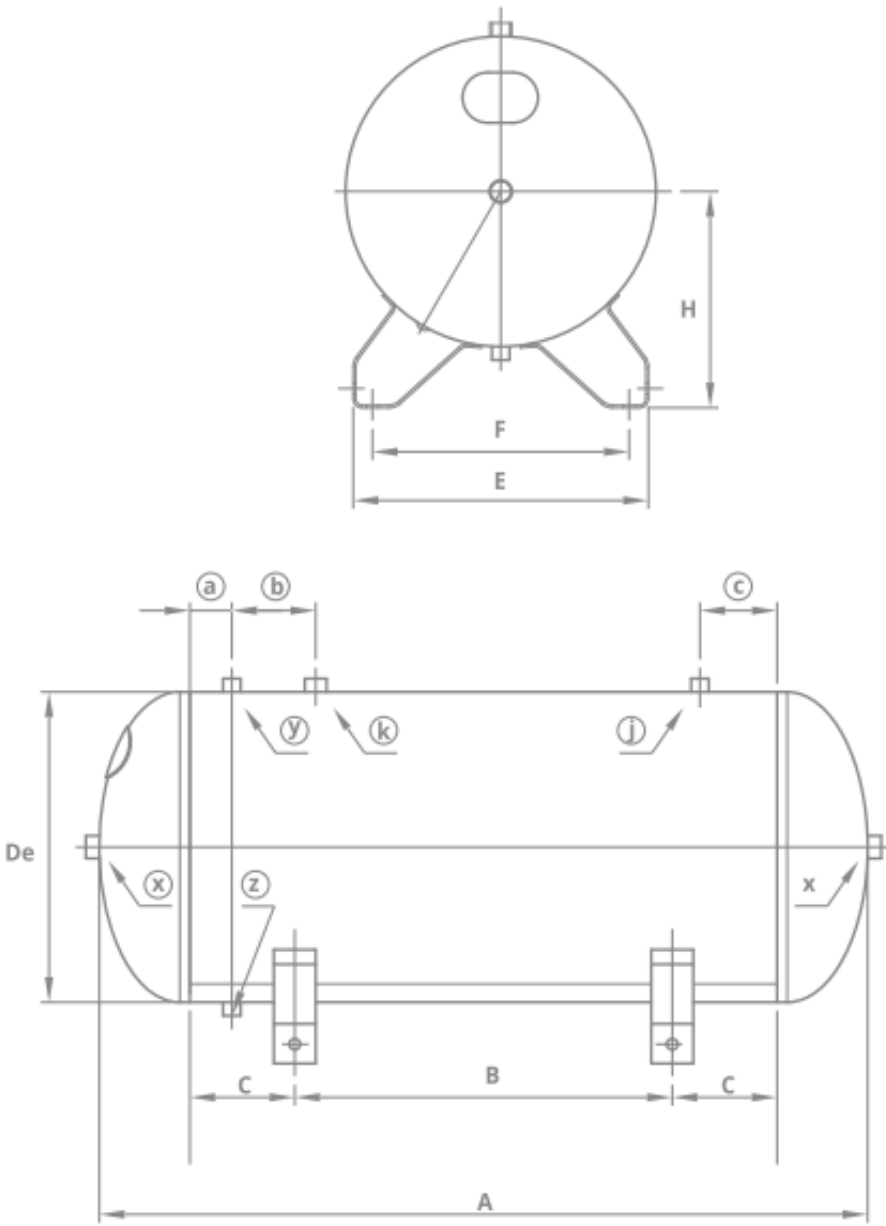

CODE	Directive	Capacity	Operating pressure	De	A	B	C	E	F	H	a	b	c	x	y	k	j	z	Weight
		lt	bar	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch	inch	inch	inch	inch	kg

GALVANIZED

HT270GALVA11	2014/29/UE	270	11	500	1458	800	175	455	402	315	50	130	50	2"	3/8"	1"	1/2"	3/8"	70
HT500GALVA11	2014/29/UE	500	11	600	1858	1204	148	530	470	396	60	155	60	2"	3/8"	1"	1/2"	3/8"	134
HT720GALVA11	2014/29/UE	720	11	750	1850	970	215	570	460	495	60	155	60	2"	3/8"	1"	1/2"	3/8"	181
HT1000GALVA11	2014/68/UE(PED)	1000	12	800	2158	1014	343	605	490	500	100	155	60	2"	3/4"	1"	1/2"	1/2"	215
HT2000GALVA11	2014/68/UE(PED)	2000	12	1100	2252	1100	275	800	685	652	200	215	-	2"	1/2"	1/2"	-	1/2"	398
HT3000GALVA11	2014/68/UE(PED)	3000	12	1200	2850	1265	227	820	710	698	1230	200	-	2"	1/2"	1/2"	-	1/2"	609