

Plastic silencers

sintered plastic


M5" - G 1"

When compressed air escapes into the atmosphere, it produces noise. This can be prevented by installing a silencer.

These dampers are made of a porous housing (sintered plastic). The air flows through the material and is distributed, reducing the noise level.




TECHNICAL FEATURES	
Size	M5 - G 1/8" - G 1/2" - G 3/8" - G 1/2" - G 3/4" - G 1"
Fluid	Compressed air
Pressure range	0 to 10
Temp. range °C	-20°C to +80°C
Filter porosity	50
BSP threads	UNI-ISO 228/1
Metric threads	UNI EN ISO 965-1
NPT threads	ANSI B 1.20.1




Pressur

0 ÷ 10 bar
0 ÷ 145 psi



Temperatur


-20°C ÷ +80°C



Porosit

50 µm

STANDARD MATERIALS		
1.	Nipple	Polyethylene
2.	Filter	Porous polyethylene

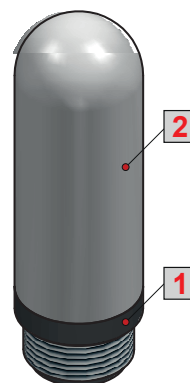

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
Netherlands

+31 (0)493 763 99
info@pneuparts.com
www.pneuparts.com

STANDARD DIMENSIONS						
Art. code	A	ØB	C	ØD	F	L
VYONS5	M5x0,8	6.8	4	2.6	17.8	21.8
VYONS18	G1/8"	12.7	6.7	5	27.8	34.5
VYONS14	G1/4"	16.5	8.9	7.5	33.9	42.8
VYONS38	G3/8"	20	11	10	56	67
VYONS12	G1/2"	24.3	11	12	66.5	77.5
VYONS34	G3/4"	38	15.5	16	115.5	131
VYONS10	G1"	48	20	22	140	160

