

Ø 25, 32, 40 & 50

- Very compact and economic series
- For ISO21287 cylinders male rod and maxi stroke 50 mm
- Precise guide on 4 brass bearings or ball bearings
- Rods Ø are the same as Classic Series (H and U)
- Rigid coupling between cylinder rod and front plate
- Delivered with 4 screws for fixing the cylinder in the body (but without rod nut)
- Without maintenance


from 5° to 80°C

Housing and front plate: Anodized aluminium

Screws: Zinc steel

Rods: Ball bearing: hardened steel

Brass bearing: Chromed steel

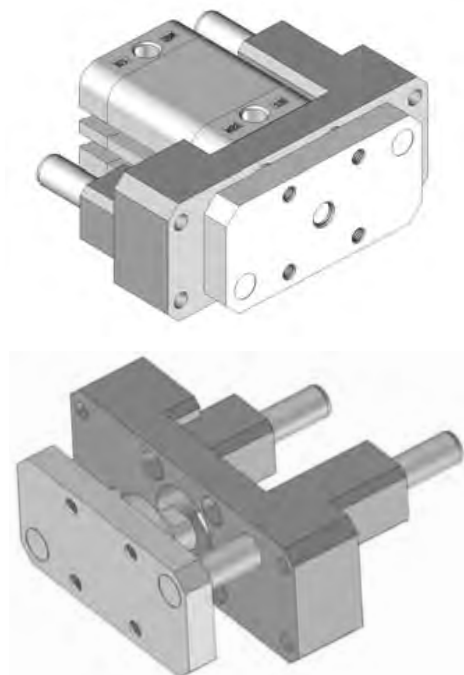

Ø Cylinder (mm)	Ø25	Ø32	Ø40	Ø50
Ø Guide rods (mm)	Ø10	Ø12	Ø16	Ø20
Weight stroke (kg)	0.4	0.6	1	1.7

I C G . E C .

Size Ø:


Ø25	25		
Ø32:	32		
Ø40:	40		
Ø50:	50		

Stroke mm:

Ø15:	15
Ø20:	20
Ø25:	25
Ø50:	50

Example: You need the guide with a Ø size from 20 mm and a stroke from 25 mm= **ICG20EC025*

You can order them the same way as the example above, when you want with ball bearing you add: **BBS** at the end of the article code= **ICG20EC025BBS**

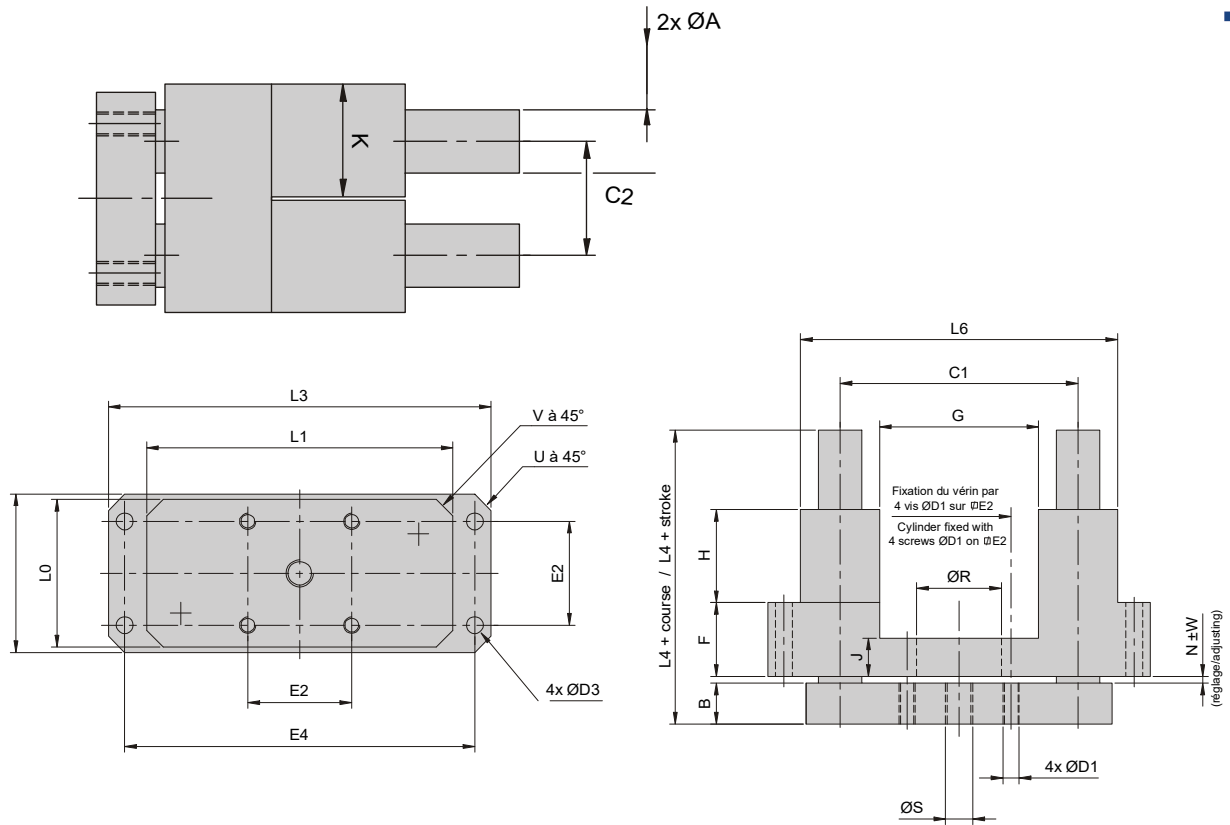

A	10	12	16	20
B	11	11	15	19
C1	62	74	87	104
C2	20	25	29	35
D1	M5	M6	M6	M8
D3	5,2	6,2	6,2	8,5
E2	26	32,5	38	46,5
E4	93	110	128	153
F	24	27	27	32
G	41,2	50,2	58,2	70
H	28,5	29,5	34	32
J	12	14	14	19
K	21	24	29	34
L0	38	45	55	68
L1	80	92	112	134
L2	41	49	58	69
L3	103	122	140	168
L4	68	73	82	90
L6	83	98	116	138
N	1,5	2	2	2
R	25	30	35	40
S	M8	M10x1,25	M10x1,25	M12x1,25
U	4	5	6	6
V	4	5	6	6
W	0,7	1	1	1