

# Hafner | 5/3-way solenoid valves

Electrically operated

**pneuparts**  
.com

**NAMUR, Bistable**

## SPECIFICATIONS

**Supplied without solenoid coil and plug, you need to order these separately.**

### Function:

5-3 way solenoid valve, bistable, NAMUR

### Materials:

Housing: Aluminium  
Seals: NBR

### Flow:

G 1/4": 1250 l/min  
G 1/2": 3000 l/min

### Temperature range:

-10 °C to max. +50 °C

### Operating pressure:

G 1/4": 3 - 10 bar  
G 1/2": 1 - 10 bar

### Medium:

Filtered compressed air

### Switching time:

50 ms | 6 bar, +20 °C


### Port size:

G 1/4", G 1/2"



## Symbol:

### Closed center

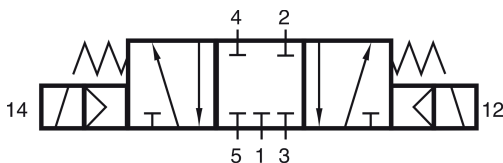


**pneuparts.com**

Florijn 10 b/c  
5751 PC, Deurne  
Netherlands

+31 (0)493 763 993  
sales@pneuparts.com  
www.pneuparts.com

**DIMENSIONS**

**G 1/4"**

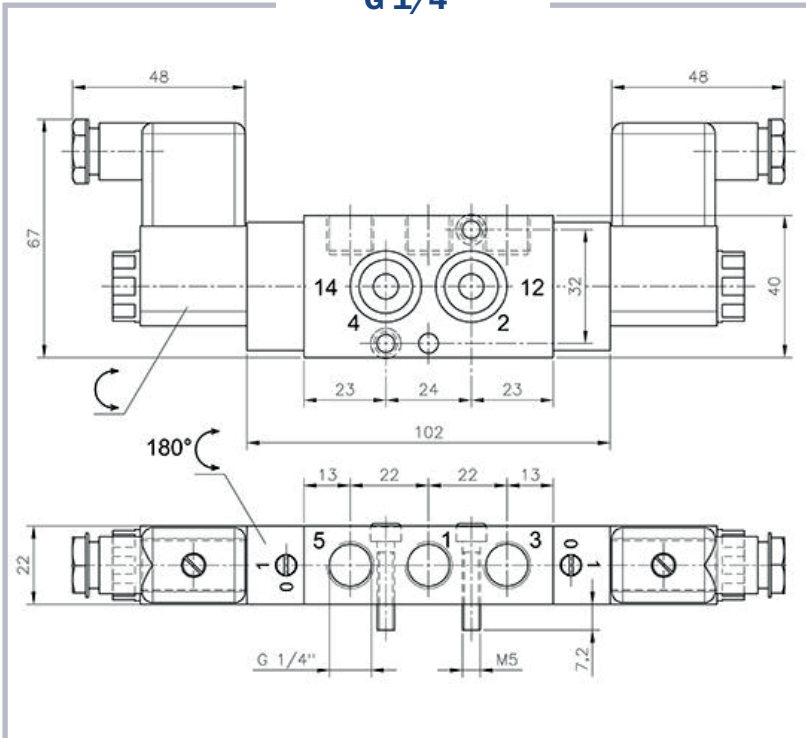

**G 1/2"**

