Hafner | 3/2-way solenoid valves

NAMUR

Monostable

SPECIFICATIONS

Supplied without solenoid coil and plug

Materials:
Housing: Aluminum
Seal: NBR
Control: brass and stainless steel

Air flow rate:
1250 l/min

Function:
3/2-way solenoid valve with NAMUR interface
Normally closed, monostable

Operating pressure:
2 to 10 bar

Temperature range:
-10 °C to max. +50 °C

Port orientation:
NAMUR - interface

Media:
Filtered compressed air

Switch-on time:
50 ms | 6 bar, +20 °C

Power consumption:
Direct current: 3 W, AC: 5 VA (50 HZ)

DIMENSIONS:

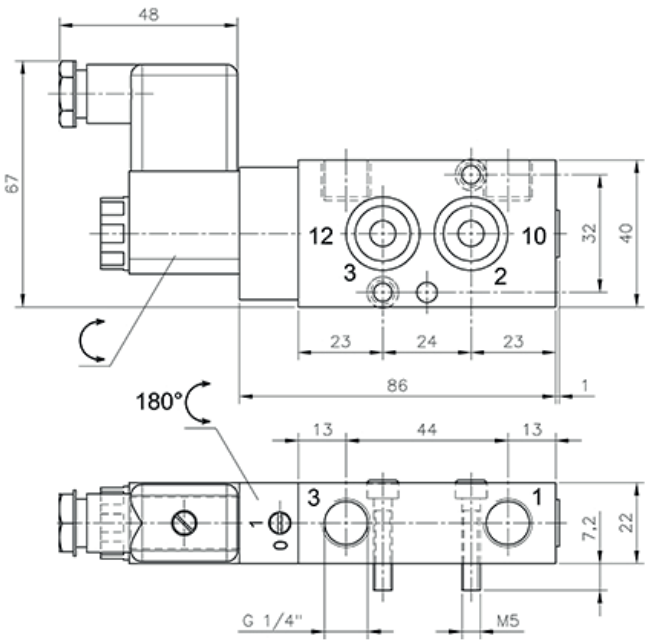

Symbool:



Normally closed

pneuparts.com
Florijn 10 b/c
5751 PC, Deurne
Netherlands

+31 (0)493 763 993
sales@pneuparts.com
www.pneuparts.com