

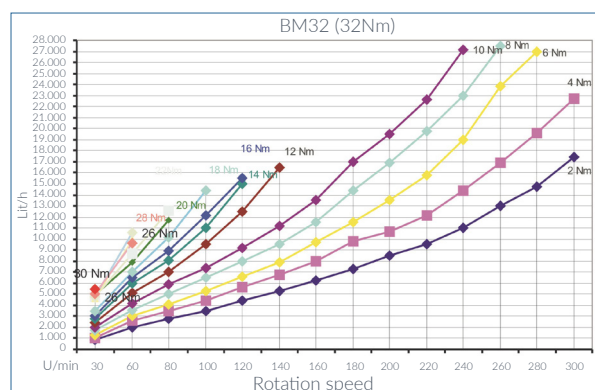
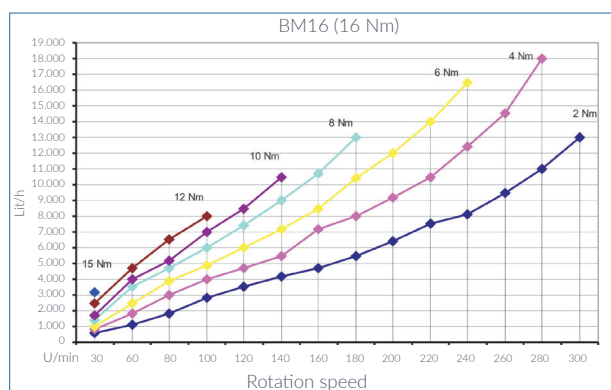
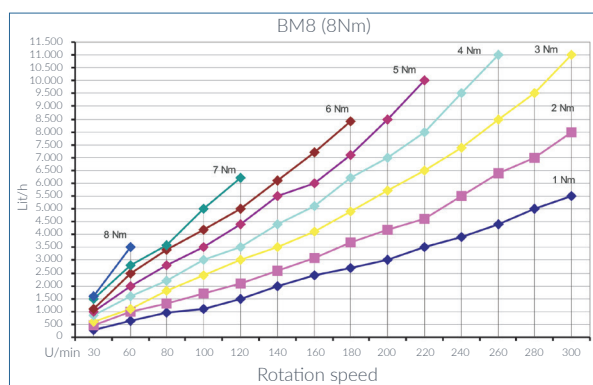
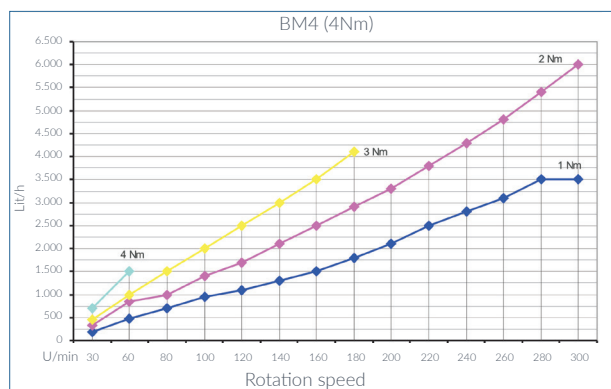


PERFORMANCE DATA

ROTATION SPEED – PERFORMANCE - AIR CONSUMPTION

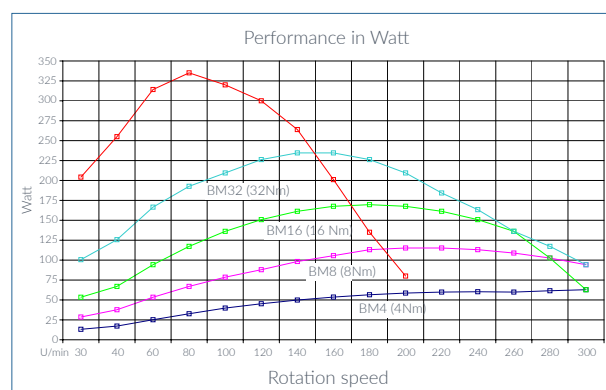

TORQUE - PERFORMANCE

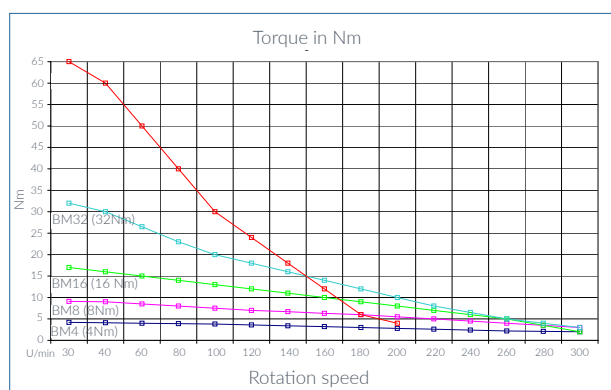

TRANSMISSIONS

(For motor data please refer to the data sheet of the respective motor)



Motor	BM4 (4Nm)			BM8 (8Nm)			BM16 (16Nm)			BM32 (32Nm)		
Transmission	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2
L1 [mm]	120	146	120	134.5	160.5	134.5	161	192.5	161	183	214.5	183
L2 [mm]	94	120	94	108.5	134.5	108.5	120	151.5	120	142	173.5	142
L3 [mm]	92.5	118.5	92.5	107	133	107	117.5	149	117.5	139.5	171	139.5
Max. rotation speed [1/min]	100	33	600	100	33	600	100	33	600	100	33	600
Starting torque [Nm]	12	36	2	24	72	4	48	144	8	96	288	16
Weight kg (motor with transmission)	2	2.8	2.1	2.1	3	2.3	5.7	7.9	5.9	7.5	8.5	6.5

TRANSMISSION STAINLESS STEEL MOTOR

Motor	BM4 (4Nm) INOX			BM8 (8Nm)			BM16 (16Nm)			BM32 (32Nm)		
Transmission	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2