


# Valves

## Hafner 5/3 valves electric pneumatic bistable

Art. code	Voltage
MH532121G24VDC	24VDC
MH532121G24VAC	24VAC
MH532121G110VAC	110VAC
MH532121G230VAC	230VAC
MH532121G	Without coil

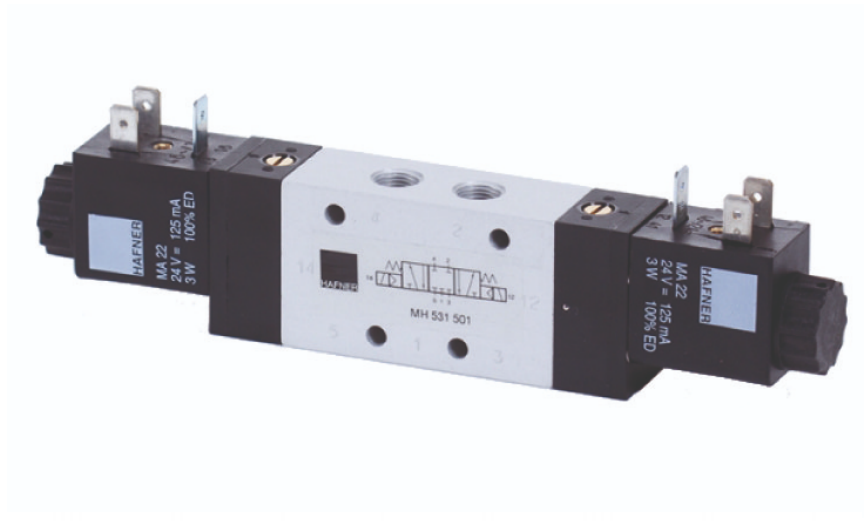

**Function:** 5/3 centre exhausted

**Gate:** G 1/2"

**Orifice (DN):** 3000 mm

**Pressure:** 1 - 10 bar

**Material:** Body: Aluminum, Seals: NBR, Pilot brass & stainless steel. Slide stainless steel

**Temperature range:** -10 °C to max. + 60 °C.

**Medium:** Oiled and non-oiled, filtered compressed air.

**Switch-on time (at 5 bar):** <25 ms.

**Control voltage:** Standard: 230V 50/60 HZ, 110V/50 Hz, 24V/50 Hz, 24V=, 12V=

**Voltage tolerance:** +/- 10%.

**Power consumption:** DC power: 3 W, AC

**Power:** 5 VA (50 HZ).

