

# Air hoses and accessories

## Polyamide hose, PA

### Polyamide hose, PA, Extra flex



#### RESIN FEATURES

- Polyamide 12 extra flexible tubing, plasticized, light and heat stabilized
- Produced with raw materials modified to enhance impact performances at low temperature

#### WORKING PRESSURE

Safety factor 3:1

#### STANDARD LENGTH

25-50-100 m


#### COLORS



Code	Hose dimensions (mm)			Weight g/m	Bending radius mm	(23°C) Working pressure BAR
	o Ø e	i Ø i	Wall thick.			
PAF4x2.5	4 ± 0,07	2,5	0,75 ± 0,07	7,8	15	23
PAF6x4	6 ± 0,07	4	1 ± 0,07	16,1	25	20
PAF8x6	8 ± 0,07	6	1 ± 0,07	22,6	50	14
PAF10x8	10 ± 0,07	8	1 ± 0,07	29,1	75	11
PAF12x10	12 ± 0,1	10	1 ± 0,07	35,6	110	9
PAF14x11	14 ± 0,1	11	1,5 ± 0,07	60,6	100	12


#### Technical features at a glance

\* End of catalog reference

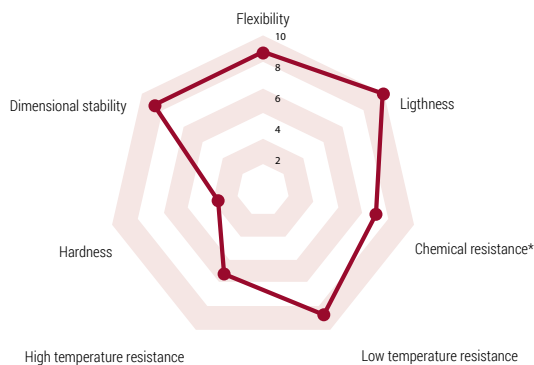

#### Pressure values expressed as a % in relation to temperature

From  
-40°C to +80°C

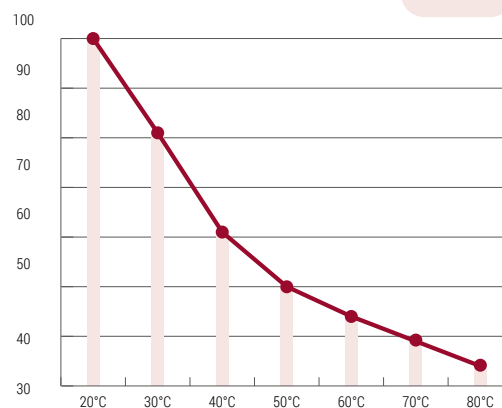

#### APPLICATIONS

- Industrial automation
- Vacuum equipment
- Machine tool
- Robotics
- Pest control lines

**Pneuparts.com**  
Florijn 10 b/c  
5751 PC Deurne  
Nederland

Phone: +31 (0)493 763 993

info@pneuparts.com  
www.pneuparts.com

BTW: NL8209.12.931B01

KvK: 17126382

Swift: RABONL24

IBAN: NL23RABO01036.31240