

ZUIGNAPPEN
VACUUM CUPS

HOLLE
CONCAVE | **VC**



Zuignappen
VACUUM CUPS

Zuignappen
VACUUM CUPS

GESCHIKT VOOR
SUITABLE FOR

VOORDELEN
ADVANTAGES

Algemeen gebruik
General use

Breed aanbod aan diameters
Wide range of diameters

Vlakke oppervlakte
Flat surfaces

Veelzijdigheid
Versatility

Licht gebogen oppervlakte
Slightly curved surfaces






Ø 20

Ø 25

Ø 25 S

Ø 28

Ø 30 S

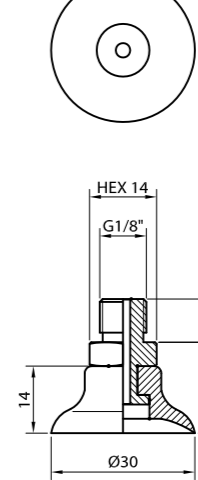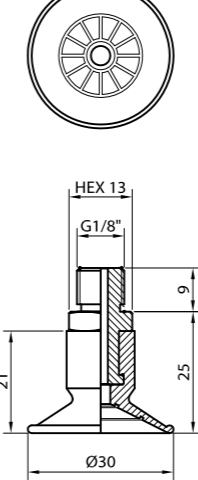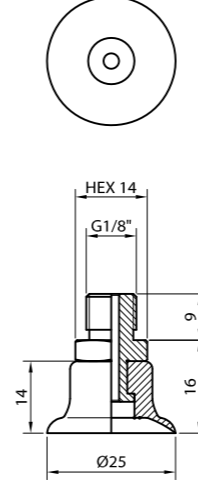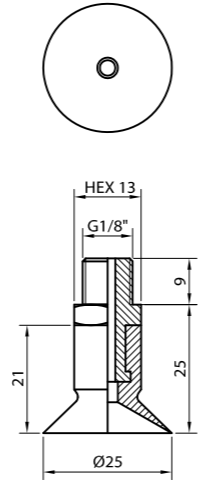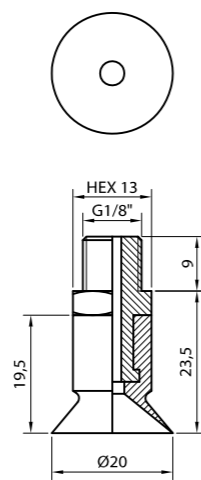

SPECIFICATIES · CHARACTERISTICS

Ø Onbelast / Ø belast	Ø unloaded / Ø loaded	[mm]
Minimale buig radius	Minimum curve radius	[mm]
Maximale slag	Maximum stroke	[mm]
Volume	Volume	[cm³]
Gewicht	Weight	[g]
Kracht -0,4 bar	Force at -0,4 bar	[Kgf]
Kracht -0,6 bar	Force at -0,6 bar	[Kgf]
Kracht -0,8 bar	Force at -0,8 bar	[Kgf]
Kracht -0,9 bar	Force at -0,9 bar	[Kgf]

20 / 22,6	25 / 27,5	25 / 28	28 / 31	30 / 32	
7,5	10	20	13	22,5	
4	4	3	4	3	
2	2	2	2,5	3	
14	14	14	14	15	
1,02	1,54	1,32	1,85	1,72	
1,44	2,10	2,04	2,59	2,71	
1,79	2,68	2,82	3,25	3,63	
2,00	2,92	3,07	3,49	4,00	

BESTELLEN · HOW TO ORDER

- Nitrile zuignap zonder fitting
Nitrile vacuum cup without fitting
 - Silicone zuignap zonder fitting
Silicone vacuum cup without fitting
 - Naturel zuignap zonder fitting
Natural rubber vacuum cup without fitting
- Standaard fitting deel**
Standard fitting part**

VC20NIT	VC25NIT	VCS25NIT	VC28NIT	VCS30NIT	
VC20SB	VC25SB	VCS25SB	VC28SB	VCS30SB	
VC20CN	VC25CN	VCS25CN	VC28CN	VCS30CN	
RAC3R1/8M	RAC3R1/8M	RAC4R1/8M	RAC3R1/8M	RAC5R1/8M	

Voorbeeld Example: VCFH_20_NIT + RAC5R1/8M